

TECHNICAL CARD



LED Frameless Downlight Fixture



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable	by the producer
---------------------------------	-----------------

Light source replaceable	by the producer
---------------------------------	-----------------

Type of light source

Energy class of the light source	E
---	---

Dimmable	no
-----------------	----

Electrical parameters

Rated voltage, frequency	AC 85-265 V, 50/60 Hz
---------------------------------	-----------------------

Rated current	210 mA
----------------------	--------

Input interface	Free wire ends
------------------------	----------------

Electric shock protection class	II
--	----

VIDEX-DOWNLIGHT-LED-DLFR-24W-NW

INDEX: VLE-DLFR-244

Photometric parameters

Useful luminous flux of the light source (Φuse)	2950 Lm
--	---------

Correlated color temperature	4000K (neutral white)
-------------------------------------	-----------------------

Beam angle	120°
-------------------	------

Color rendering index (CRI)	Ra > 80
------------------------------------	---------

Lifetime	30000 h
-----------------	---------

On/Off cycles	20000
----------------------	-------

Useful luminous flux of the light source reference	in a sphere (360°)
---	--------------------

Additional information

Place of installation	Ceiling, Recessed
------------------------------	-------------------

Place of application	indoor
-----------------------------	--------

Housing colour	White
-----------------------	-------

Diffuser material	Plastic
--------------------------	---------

Ultraviolet radiation	no
------------------------------	----

Operating temperature range	-20° +40°C
------------------------------------	------------

Mercury content	Does not contain
------------------------	------------------

Ingress protection	IP54 / IP20
---------------------------	-------------

Housing material	Iron alloy
-------------------------	------------

Dimensions

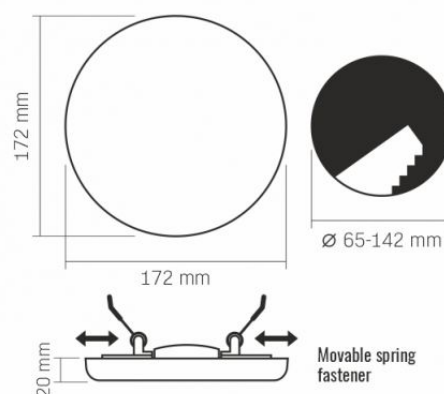
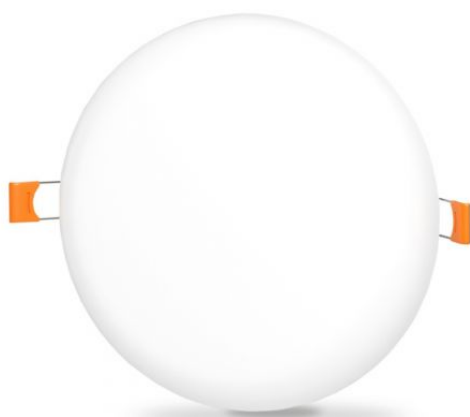
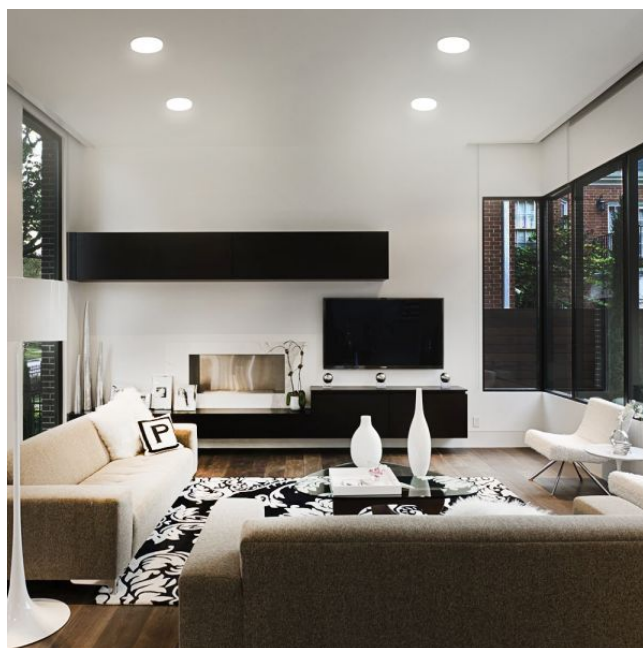
EAN	5904405540800
------------	---------------

Height	172 mm
---------------	--------

Width	172 mm
--------------	--------

VIDEX[®]

VIDEX-DOWNLIGHT-LED-DLFR-24W-NW

INDEX: VLE-DLFR-244**Depth** 20 mm**Outer box** 20 pcs.

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 21.12.2024