

TECHNICAL CARD



LED Frameless Downlight Fixture



VIDEX®



120°



Ra ≥ 80



30 000 h



20 000



Free



Not Dimmable



Free



IP20

↓ IP54

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable by the producer

Light source replaceable by the producer

Type of light source

Energy class of the light source E

Dimmable no

Electrical parameters

Rated voltage, frequency AC 85-265 V, 50/60 Hz

Rated current 210 mA

Input interface Free wire ends

Electric shock protection class II

VIDEX-DOWNLIGHT-LED-DLFR-24W-NW

INDEX: VLE-DLFR-244

Photometric parameters

Useful luminous flux of the light source (Φ_{use}) 2950 Lm

Correlated color temperature 4000K (neutral white)

Beam angle 120°

Color rendering index (CRI) Ra > 80

Lifetime 30000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a sphere (360°)

Additional information

Place of installation Ceiling, Recessed

Place of application indoor

Housing colour White

Diffuser material Plastic

Ultraviolet radiation no

Operating temperature range -20° +40°C

Mercury content Does not contain

Ingress protection IP54 / IP20

Housing material Iron alloy

Dimensions

EAN 5904405540800

Height 172 mm

Depth 20 mm




VIDEX®

VIDEX-DOWNLIGHT-LED-DLFR-24W-NW

INDEX: VLE-DLFR-244

Width 172 mm

Outer box 20 pcs.

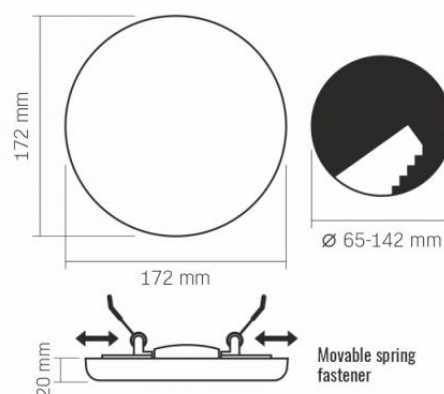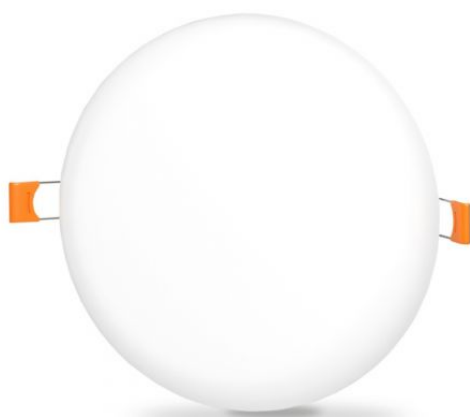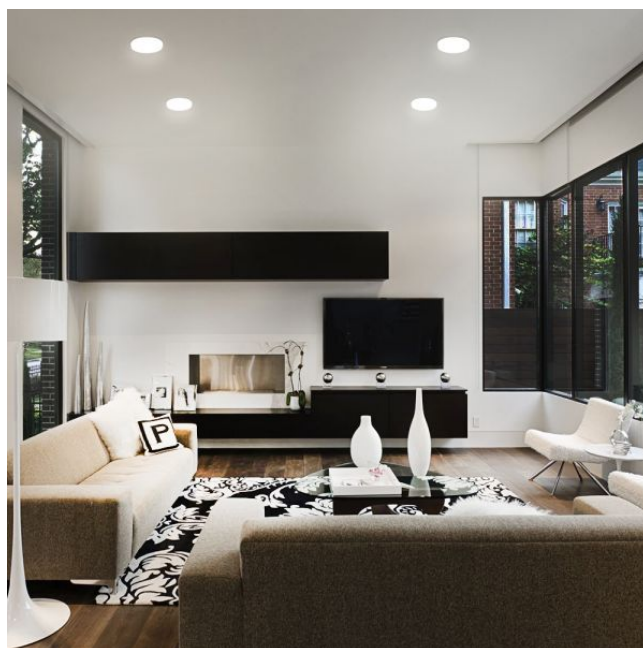

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegró Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

Date: 8.09.2024