

TECHNICAL CARD



LED Frameless Downlight Fixture



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



ON/OFF

20 000



30 000 h



Free



Not Dimmable



-20° +40°C



Free



IP20

↓ IP54

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer
Control gear replaceable	by the producer

Type of light source

Energy efficiency class of the contained light source E

Dimmable no

Electrical parameters

Rated voltage, frequency AC 85-265 V, 50/60 Hz

Rated current 130 mA

VIDEX-DOWNLIGHT-LED-DLFS-15W-NW

INDEX: VLE-DLFS-154

Input interface	Free wire ends
Electric shock protection class	II

Photometric parameters

Useful luminous flux of the contained light source (Φ_{use})	2100 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)

Additional information

Place of installation	Ceiling, Recessed
Place of application	indoor
Housing colour	White
Diffuser material	Plastic
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP54 / IP20
Housing material	Iron alloy



Dimensions

VIDEX®

VIDEX-DOWNLIGHT-LED-DLFS-15W-NW

INDEX: VLE-DLFS-154



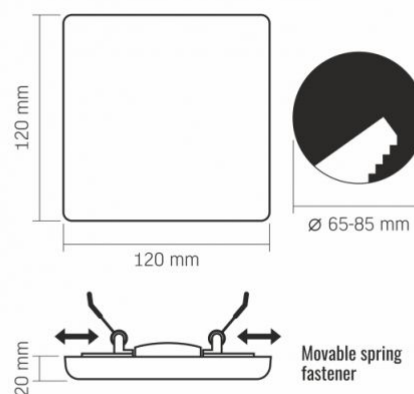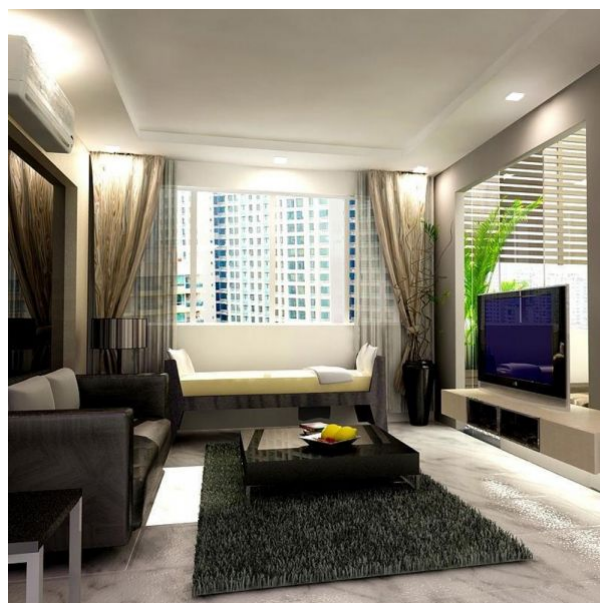








EAN	5904405540824
Outer box	20 pcs.
Height	120 mm
Width	120 mm
Depth	20 mm



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VLE-DLFS-154

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  — Rated beam angle
120°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Rated On/off cycles
ON/OFF
20 000
-  — Nominal lifetime (hours)
30 000 h
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° +40°C
-  — The product does not contain mercury
Free
-  — IP54 - external part, IP20 - mounting part
IP20
↓ IP54