

TECHNICAL CARD



LED Headlamp

VIDEX®



WARRANTY 2 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable no

Technology LED

Electrical parameters

On-mode power (Pon) 5 W + COB

Input interface Micro USB

Photometric parameters

Useful luminous flux of the contained light source (Φ_{use}) 410 Lm

Correlated color temperature 5000K (neutral white)

Peak luminous intensity 1840 cd

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery indicator	4 level
Battery replaceable	no
Mercury content	Does not contain
Ingress protection	IP65
Housing material	PC

Dimensions

EAN	4820246481069
Height	46 mm
Depth	38 mm
Width	70 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	108g

Signs marking goods

Packaging marking CE, Utilization

VIDEX[®]

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

VIDEX[®]

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

MODEL | H035C

RECHARGEABLE LED HEADLAMP
WITH SENSOR



410
MAX LUMENS



1800 mAh
LI-ION



DUAL
LIGHT



IP65



1m
SHOCKPROOF



RED
LIGHT

VIDEX®

MODEL | H035C

COB 5W
5000K

CREE XTE 5W
5000K



Cree XTE 5W 5000K (Neutral white). Beam angle 85°, distance up to 86 m.
COB 5W 5000K (Neutral white). Beam angle 120°, distance up to 14 m.

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



INDEX: VLF-H035C

VIDEX® DURABLE SHELL
MODEL H035C



The body is made of thick polyamide - a hard polymer that protects the device from falls and other difficult environmental conditions.

VIDEX® MICRO-USB
MODEL H035C



Charging port protected from dirt and water by the silicone plug.

VIDEX®
MODEL H035C



BATTERY INDICATION

- ● ● ● ● - < 100% charge
- ● ● ● ● - < 80% charge
- ● ● ● ● - < 60% charge
- ● ● ● ● - < 40% charge
- ● ● ● ● - < 20% charge
- ● ● ● ● - < battery discharged

VIDEX® NYLON STRAP
MODEL H035C





Wear-resistant and elastic headband fits comfortably on the head.



VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

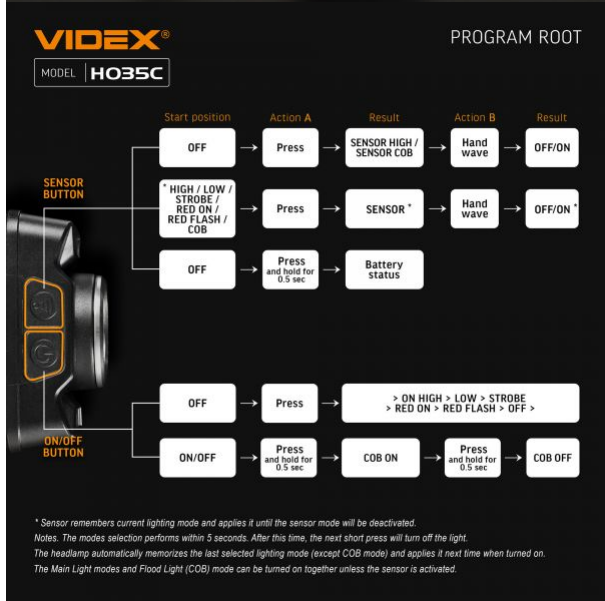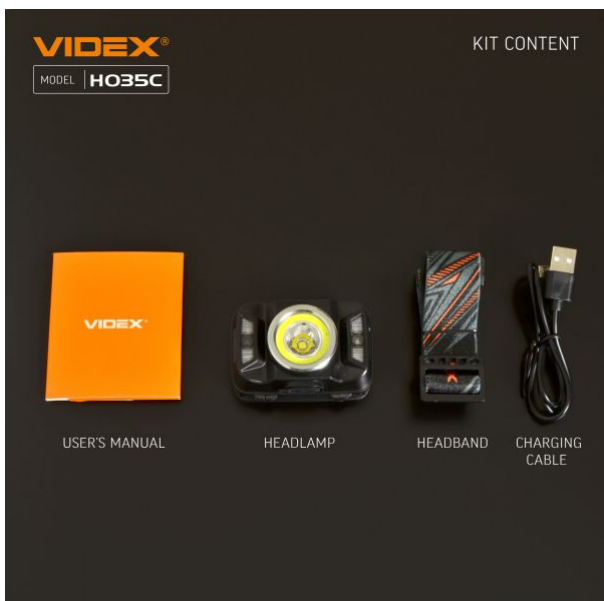

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

- The product meets the requirements of EU directives
- It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
- 1m SHOCK RESISTANT — The protection is effective in case of a fall from a height of up to 1 meter
- Not Dimmable — The product is incompatible with light regulators
- 20° +40°C — Operating temperatures range
- Hg Free — The product does not contain mercury
- IP65 — Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions