

TECHNICAL CARD



LED Headlamp

VIDEX®



WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Operation mode	HIGH, LOW, STROBE, COB, COB + HIGH, RED ON, RED FLASH
Light source replaceable	no

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	5 W + COB
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	410 Lm
--	--------

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1840 cd

Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery indicator	4 level
Battery replaceable	no
Mercury content	Does not contain
Ingress protection	IP65
Housing material	PC

Dimensions

EAN	4820246481069
Height	46 mm
Depth	38 mm
In the package	1 pc.
Outer box	20 pcs.
Width	70 mm
Unit nett weight	108g

Signs marking goods

VIDEX[®]

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

Packaging marking

CE, Utilization



VIDEX[®]**VIDEX VLF-H035C 410Lm 5000K****INDEX: VLF-H035C**

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®
MODEL | H035C

RECHARGEABLE LED HEADLAMP
WITH SENSOR

410
MAX LUMENS

1800 mAh
LI-ION

DUAL
LIGHT

IP65

1m
SHOCKPROOF

RED
LIGHT

VIDEX®
MODEL | H035C

COB 5W
5000K

CREE XTE 5W
5000K

Cree XTE 5W 5000K (Neutral white). Beam angle 80°, distance up to 86 m.
COB 5W 5000K (Neutral white). Beam angle 120°, distance up to 14 m.

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

VIDEX®
MODEL | H035C

DURABLE SHELL



The body is made of thick polyamide - a hard polymer that protects the device from falls and other difficult environmental conditions.

VIDEX®
MODEL | H035C



BATTERY INDICATION

■■■■■■ - ≤ 100% charge
 ■■■■■■ - ≤ 80% charge
 ■■■■■■ - ≤ 60% charge
 ■■■■■■ - ≤ 40% charge
 ■■■■■■ - ≤ 20% charge
 ■■■■■■ - ≤ battery discharged

VIDEX®
MODEL | H035C

USB-C PORT



Charging port protected from dirt and water by the silicone plug.

VIDEX®
MODEL | H035C

NYLON STRAP




Wear-resistant and elastic headband fits comfortably on the head.

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

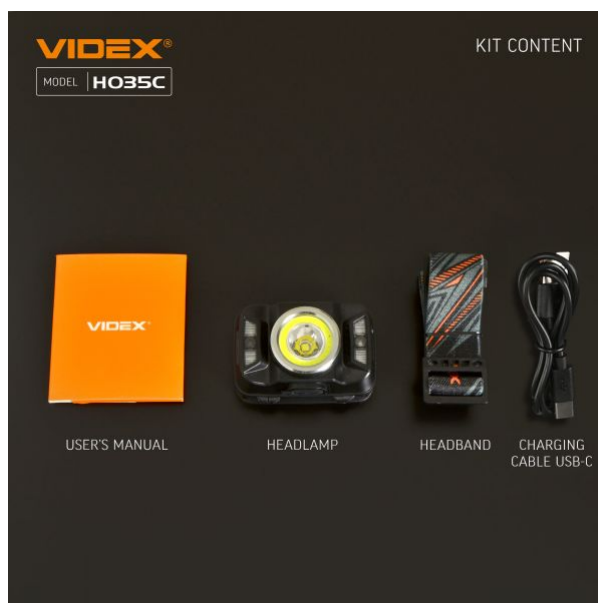

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



The protection is effective in case of a fall from a height of up to 1 meter



The product is incompatible with light regulators



Operating temperatures range



The product does not contain mercury



Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions