

## TECHNICAL CARD



LED Headlamp

# VIDEX®



## WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

**Light source replaceable** no

### Type of light source

**Dimmable** no

**Technology** LED

### Electrical parameters

**On-mode power (Pon)** 5 W + COB

**Input interface** Micro USB

### Photometric parameters

**Useful luminous flux of the contained light source (Φuse)** 410 Lm

**Correlated color temperature** 5000K (neutral white)

**Peak luminous intensity** 1840 cd

VIDEX VLF-H035C 410Lm 5000K

### INDEX: VLF-H035C

### Additional information

<b>Housing colour</b>	Black
<b>Fall protection</b>	1 m
<b>Operating temperature range</b>	-20° +40°C
<b>Battery type</b>	Li-ion
<b>Battery voltage</b>	3.7 V
<b>Battery capacity</b>	1800 mAh
<b>Battery indicator</b>	4 level
<b>Battery replaceable</b>	no
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	PC

### Dimensions

<b>EAN</b>	4820246481069
<b>Height</b>	46 mm
<b>Depth</b>	38 mm
<b>Width</b>	70 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	108g

### Signs marking goods

**Packaging marking** CE, Utilization

# VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



**VIDEX<sup>®</sup>****VIDEX VLF-H035C 410Lm 5000K****INDEX: VLF-H035C**

# VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



**VIDEX®**  
MODEL | H035C

RECHARGEABLE LED HEADLAMP  
WITH SENSOR

**410**  
MAX LUMENS

1800 mAh  
LI-ION

DUAL  
LIGHT

IP65  
SHOCKPROOF

1m  
SHOCKPROOF

RED  
LIGHT

**VIDEX®**  
MODEL | H035C

COB 5W  
5000K

CREE XTE 5W  
5000K

Cree XTE 5W 5000K (Neutral white). Beam angle 85°, distance up to 86 m.  
COB 5W 5000K (Neutral white). Beam angle 120°, distance up to 14 m.

# VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



# VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



# VIDEX®

## VIDEX VLF-H035C 410Lm 5000K

### INDEX: VLF-H035C

**VIDEX®**  
MODEL | H035C

DURABLE SHELL



The body is made of thick polyamide - a hard polymer that protects the device from falls and other difficult environmental conditions.

**VIDEX®**  
MODEL | H035C



BATTERY INDICATION

- ● ● ● ● - ≤ 100% charge
- ● ● ● ● - ≤ 80% charge
- ● ● ● ● - ≤ 60% charge
- ● ● ● ● - ≤ 40% charge
- ● ● ● ● - ≤ 20% charge
- ● ● ● ● - ≤ battery discharged

**VIDEX®**  
MODEL | H035C

MICRO-USB



Charging port protected from dirt and water by the silicone plug.

**VIDEX®**  
MODEL | H035C

NYLON STRAP




Wear-resistant and elastic headband fits comfortably on the head.

# VIDEX®

## VIDEX VLF-H035C 410Lm 5000K

### INDEX: VLF-H035C

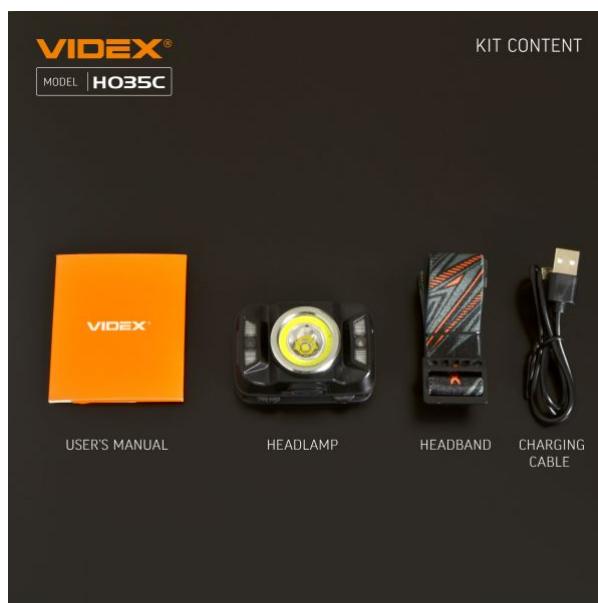

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



1m  
SHOCK  
RESISTANT

— The protection is effective in case of a fall from a height of up to 1 meter



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture.  
The product has full protection against dust and water jets from all directions

Date: 9.05.2025