

TECHNICAL CARD



LED Headlamp

VIDEX®



WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Operation mode	HIGH, LOW, STROBE, COB, COB + HIGH, RED ON, RED FLASH
Light source replaceable	no

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	5 W + COB
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	410 Lm
--	--------

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1840 cd

Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery indicator	4 level
Battery replaceable	no
Mercury content	Does not contain
Ingress protection	IP65
Housing material	PC

Dimensions

EAN	4820246481069
Height	46 mm
Depth	38 mm
In the package	1 pc.
Outer box	20 pcs.
Width	70 mm
Unit nett weight	108g

Signs marking goods

VIDEX[®]

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C**Packaging marking**

CE, Utilization



VIDEX[®]

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®
MODEL | H035C

RECHARGEABLE LED HEADLAMP
WITH SENSOR

410
MAX LUMENS

1800 mAh
LI-ION

DUAL
LIGHT

IP65

1m
SHOCKPROOF

RED
LIGHT

VIDEX®
MODEL | H035C

COB 5W
5000K

CREE XTE 5W
5000K

Cree XTE 5W 5000K (Neutral white). Beam angle 85°, distance up to 86 m.
COB 5W 5000K (Neutral white). Beam angle 120°, distance up to 14 m.

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C



VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

VIDEX®
MODEL | H035C

DURABLE SHELL



The body is made of thick polyamide - a hard polymer that protects the device from falls and other difficult environmental conditions.

VIDEX®
MODEL | H035C



BATTERY INDICATION

- ● ● ● ● - ≤ 100% charge
- ● ● ● ● - ≤ 80% charge
- ● ● ● ● - ≤ 60% charge
- ● ● ● ● - ≤ 40% charge
- ● ● ● ● - ≤ 20% charge
- ● ● ● ● - ≤ battery discharged

VIDEX®
MODEL | H035C

MICRO-USB



Charging port protected from dirt and water by the silicone plug.

VIDEX®
MODEL | H035C

NYLON STRAP




Wear-resistant and elastic headband fits comfortably on the head.

VIDEX®

VIDEX VLF-H035C 410Lm 5000K

INDEX: VLF-H035C

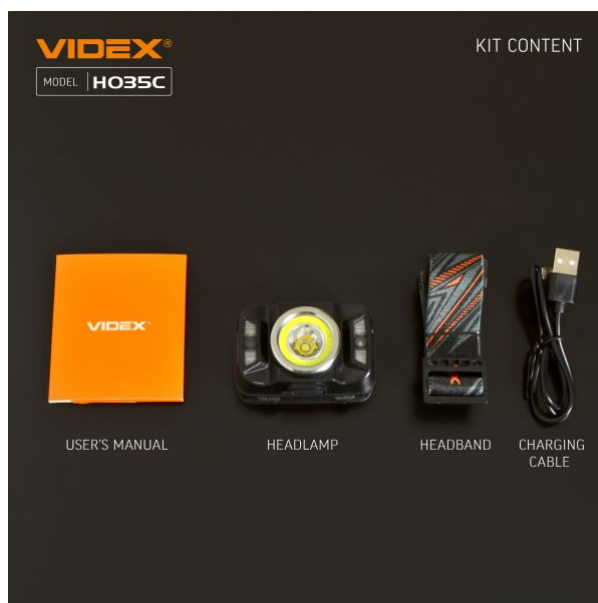

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



1m
SHOCK
RESISTANT

— The protection is effective in case of a fall from a height of up to 1 meter



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture.
The product has full protection against dust and water jets from all directions

Date: 30.07.2025