

TECHNICAL CARD



LED Headlamp

VIDEX®



WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrallyno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable no

Technology LED

Electrical parameters

On-mode power (Pon) 10 W

Input interface USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φuse) 1200 Lm

Correlated color temperature 5000K (neutral white)

Peak luminous intensity 2400 cd

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

Additional information

Housing colour	Black
Fall protection	2 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 18650, CR123A (2pcs)
Battery voltage	3.7 V, 3 V
Battery capacity	2200 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum
Dimensions	
EAN	4820246483094
Height	26 mm
Depth	35 mm
Width	90 mm
In the package	1 pc.
Outer box	1 pcs.
Unit nett weight	116g
Signs marking goods	
Packaging marking	CE, Utilization

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®
MODEL: H065A

RECHARGEABLE ALUMINUM
LED HEADLAMP

1200
MAX LUMENS

REPLACEABLE BATTERY

TYPE-C

2m IP68

2m SHOCK RESISTANCE

VIDEX®
MODEL: H065A

LUMINUS SST40
10W 5000K
(Neutral White)

The LED reaches a maximum brightness of up to 1200 lumens and a beam distance of up to 100 meters. The lifetime of the LED is 50,000 hours.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX®
MODEL H065A

OPTICAL LENS

A frosted optical lens distributes the light, creating high beam and side low beam together. This is important when trail running or cycling.

VIDEX®
MODEL H065A

CONTROL WITH ONE SWITCH

POWER BUTTON

1. Turbo - 1200 LM
2. High - 700 LM
3. Middle - 400 LM
4. Low - 130 LM
5. Moon - 25 LM
6. SOS - Press and hold for 3 sec.

The switch has a tangible tactile response. The headlamp is easy to operate even in gloves.





VIDEX®
MODEL H065A



ALUMINUM BODY

Durable aluminum body withstands a fall from a height of 2 meters.

VIDEX®
MODEL H065A

IP68 WATER RESISTANCE

Allows short-term immersion of the device under water to a depth of up to 2 meters.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A





VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



The charging port is protected from dirt and water.



4-level integrated battery indication.




WITH BATTERY
2200mAh

	TURBO	HIGH	MIDDLE	LOW	MOON	SOS
OUTPUT	1200 Lm	700 Lm	400 Lm	130 Lm	25 Lm	700 Lm
RUNTIME	1h 20min	1h 30min	3h	11h	58h	2h 30min
DISTANCE	100m	70m	55m	30m	13m	70m
INTENSITY	2400cd	1300cd	770cd	240cd	45cd	1300cd

The above output parameters tested with the stock battery Videx 18650 2200mAh and may vary due to conditions and actual batteries used.

*Turbo mode output levels may be reduced by the overheat control system.

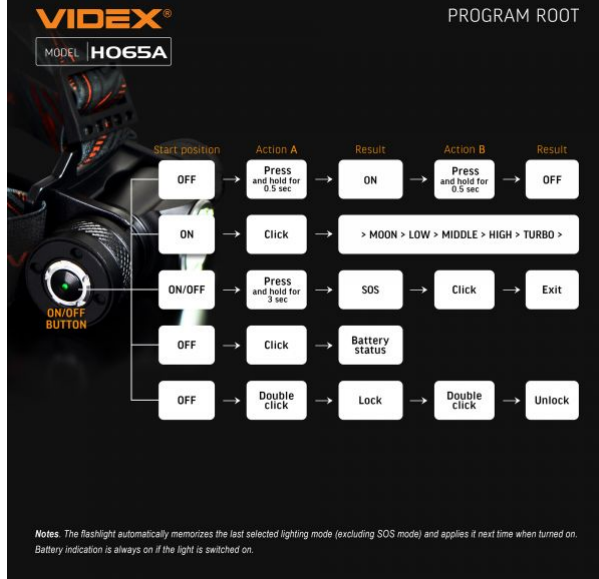

Notes: The flashlight automatically memorizes the last selected lighting mode (excluding SOS mode) and applies it next time when turned on. Battery indication is always on if the light is switched on.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP68

— Class of protection against dust and moisture. The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter