

TECHNICAL CARD



LED Headlamp

VIDEX®



WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Operation mode	TURBO, HIGH, MIDDLE, LOW, MOON, SOS
Light source replaceable	no
Battery Warranty	1 year

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	1200 Lm
---	---------

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

Correlated color temperature	5000K (neutral white)
Peak luminous intensity	2400 cd

Additional information

Housing colour	Black
Fall protection	2 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 18650, CR123A (2pcs)
Battery voltage	3.7 V, 3 V
Battery capacity	2200 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

Dimensions

EAN	4820246483094
Height	26 mm
Depth	35 mm
In the package	1 pc.
Outer box	1 pcs.
Width	90 mm
Unit nett weight	116g

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

Signs marking goods

Packaging marking

CE, Utilization



VIDEX[®]**VIDEX VLF-H065A 1200Lm 5000K****INDEX: VLF-H065A**

VIDEX[®]**VIDEX VLF-H065A 1200Lm 5000K****INDEX: VLF-H065A**

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®
MODEL H065A

RECHARGEABLE ALUMINUM
LED HEADLAMP

1200
MAX LUMENS

REPLACEABLE
BATTERY

TYPE-C

2m
IP68

2m
SHOCK
RESISTANCE

VIDEX®
MODEL H065A


LUMINUS SST40
10W 5000K
(Neutral White)

The LED reaches a maximum brightness of up to 1200 lumens
and a beam distance of up to 100 meters.
The lifetime of the LED is 50,000 hours.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

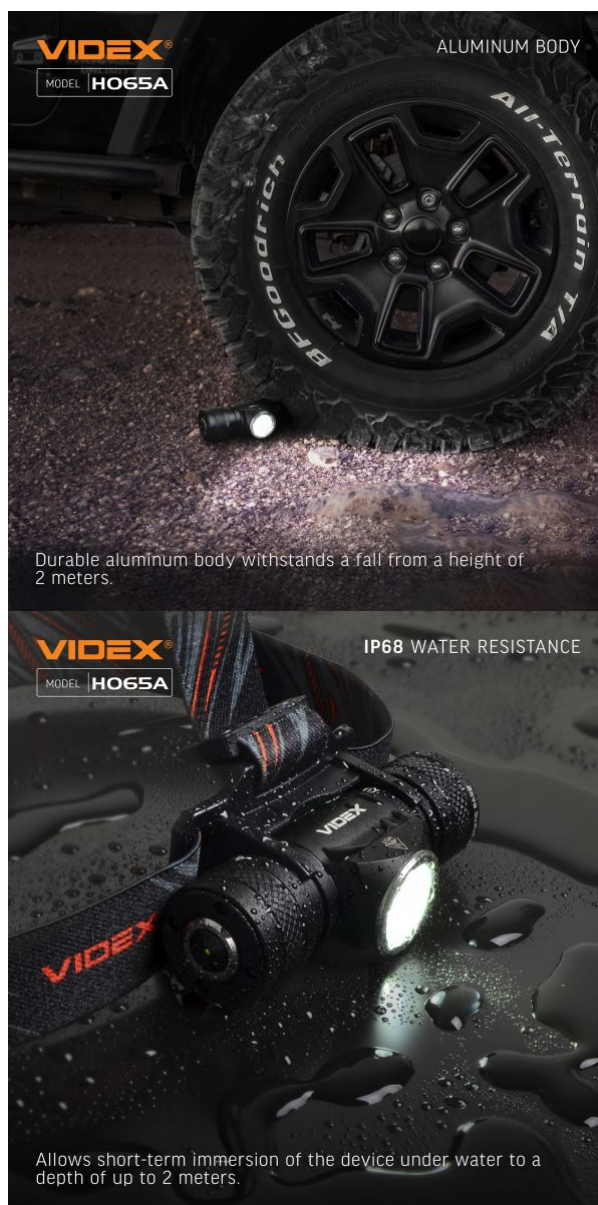

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®
MODEL **H065A**

WITH BATTERY 2200mAh

	TURBO	HIGH	MIDDLE	LOW	MOON	SOS
OUTPUT	1200 Lm	700 Lm	400 Lm	130 Lm	25 Lm	700 Lm
RUNTIME	1h 20min	1h 30min	3h	11h	58h	2h 30min
DISTANCE	100m	70m	55m	30m	13m	70m
INTENSITY	2400cd	1300cd	770cd	240cd	45cd	1300cd

The above output parameters tested with the stock battery Videx 18650 2200mAh and may vary due to conditions and actual batteries used.

*Turbo mode output levels may be reduced by the overheat control system.

VIDEX®
MODEL **H065A**

PROGRAM ROOT

Start position	Action A	Result	Action B	Result
OFF	Press and hold for 0.5 sec	ON	Press and hold for 0.5 sec	OFF
ON	Click	> MOON > LOW > MIDDLE > HIGH > TURBO >		
ON/OFF	Press and hold for 3 sec	SOS	Click	Exit
OFF	Click	Battery status		
OFF	Double click	Lock	Double click	Unlock

Notes: The flashlight automatically memorizes the last selected lighting mode (excluding SOS mode) and applies it next time when turned on. Battery indication is always on if the light is switched on.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter