

VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

TECHNICAL CARD



LED Headlamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



Not Dimmable



Free



IP68

WARRANTY 3 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevrtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
---------------------------------	----

Type of light source

Dimmable	no
-----------------	----

Technology	LED
-------------------	-----

Electrical parameters

On-mode power (Pon)	10 W
----------------------------	------

Input interface	USB-C
------------------------	-------

Photometric parameters

Useful luminous flux of the light source (Φ_{use})	1200 Lm
---	---------

Correlated color temperature	5000K (neutral white)
-------------------------------------	--------------------------

Peak luminous intensity	2400 cd
--------------------------------	---------

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

Additional information

Housing colour	Black
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

Dimensions

EAN	4820246483094
Height	26 mm
Width	90 mm
Depth	35 mm
Outer box	1 pcs.
Unit nett weight	116g
In the package	1 pc.

Signs marking goods

Packaging marking	CE, Utilization
--------------------------	-----------------

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®
MODEL | H065A

RECHARGEABLE ALUMINUM
LED HEADLAMP

1200
MAX LUMENS

- REPLACEABLE BATTERY
- TYPE-C
- 2m IP68
- 2m SHOCK RESISTANCE

VIDEX®
MODEL | H065A

LUMINUS SST40
10W 5000K
(Neutral White)

The LED reaches a maximum brightness of up to 1200 lumens and a beam distance of up to 100 meters. The lifetime of the LED is 50,000 hours.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX®
MODEL H065A

OPTICAL LENS

A frosted optical lens distributes the light, creating high beam and side low beam together. This is important when trail running or cycling.

VIDEX®
MODEL H065A

CONTROL WITH ONE SWITCH

POWER BUTTON

1. Turbo - 1200 LM
2. High - 700 LM
3. Middle - 400 LM
4. Low - 130 LM
5. Moon - 25 LM
6. SOS - Press and hold for 3 sec.

The switch has a tangible tactile response. The headlamp is easy to operate even in gloves.



VIDEX®
MODEL H065A


ALUMINUM BODY

Durable aluminum body withstands a fall from a height of 2 meters.

VIDEX®
MODEL H065A

IP68 WATER RESISTANCE

Allows short-term immersion of the device under water to a depth of up to 2 meters.

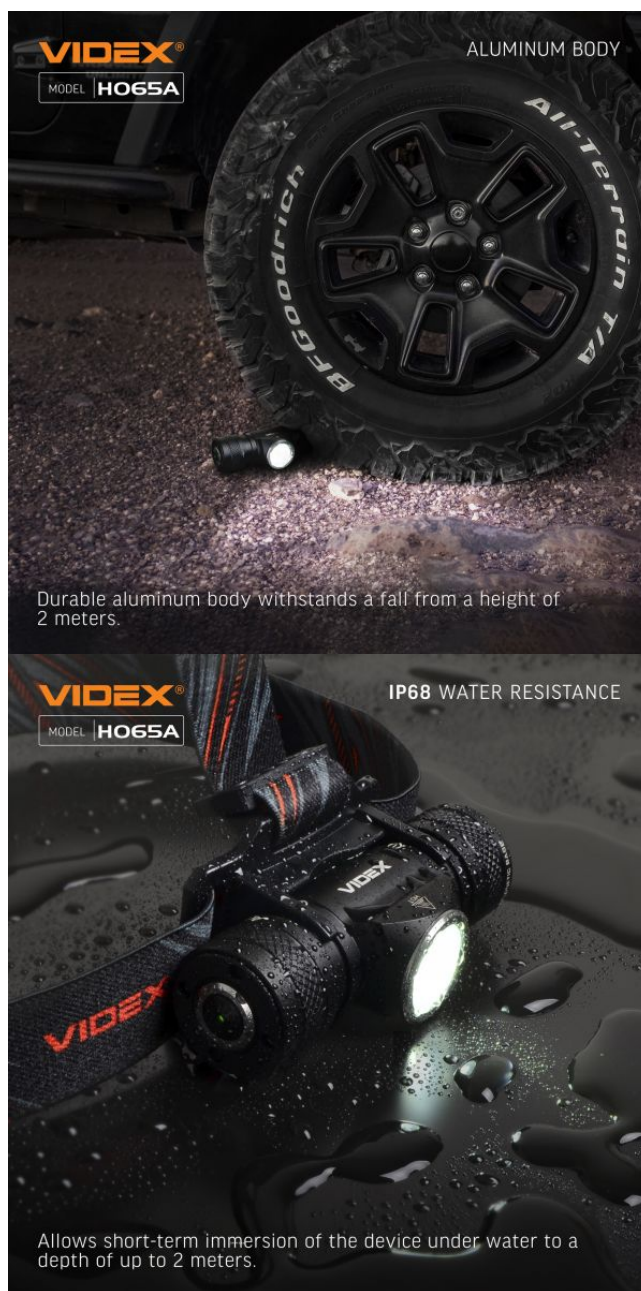

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



INDEX: VLF-H065A



VIDEX®
MODEL H065A

TYPE-C

The charging port is protected from dirt and water.



VIDEX®
MODEL H065A

CHARGE INDICATION

- 100-85% CHARGE
- 85-50% CHARGE
- 50-25% CHARGE
- 25-1% CHARGE

4-level integrated battery indication.




VIDEX®
MODEL H065A

WITH BATTERY 2200mAh

	TURBO*	HIGH	MIDDLE	LOW	MOON	SOS
OUTPUT	1200 Lm	700 Lm	400 Lm	130 Lm	25 Lm	700 Lm
RUNTIME	1h 20min	1h 30min	3h	11h	58h	2h 30min
DISTANCE	100m	70m	55m	30m	13m	70m
INTENSITY	2400cd	1300cd	770cd	240cd	45cd	1300cd

The above output parameters tested with the stock battery Videx 18650 2200mAh and may vary due to conditions and actual batteries used.

*Turbo mode output levels may be reduced by the overheat control system.



VIDEX®
MODEL H065A

PROGRAM ROOT

Start position	Action A	Result	Action B	Result
OFF	Press and hold for 0.5 sec	ON	Press and hold for 0.5 sec	OFF
ON	Click	> MOON > LOW > MIDDLE > HIGH > TURBO >		
ON/OFF	Press and hold for 3 sec	SOS	Click	Exit
OFF	Click	Battery status		
OFF	Double click	Lock	Double click	Unlock

Notes: The flashlight automatically memorizes the last selected lighting mode (excluding SOS mode) and applies it next time when turned on. Battery indication is always on if the light is switched on.

VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.