

TECHNICAL CARD



LED Headlamp

VIDEX®



WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable no

Technology LED

Electrical parameters

On-mode power (Pon) 5 W + COB

Input interface USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φuse) 550 Lm

Correlated color temperature 5000K (neutral white)

Peak luminous intensity 4000 cd

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C

Additional information

Housing colour	Black
Fall protection	1.5 m
Operating temperature range	-20° +40°C
Battery type	Li-ion VLF-B12, AAA disposable battery
Battery voltage	3.7 V, 1.5 V
Battery capacity	1200 mAh
Battery indicator	5 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum, Polyamide

Dimensions

EAN	4820246483216
Height	45 mm
Depth	50 mm
Width	60 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	78g

Signs marking goods

Packaging marking CE, Utilization

VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C

VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K


INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C

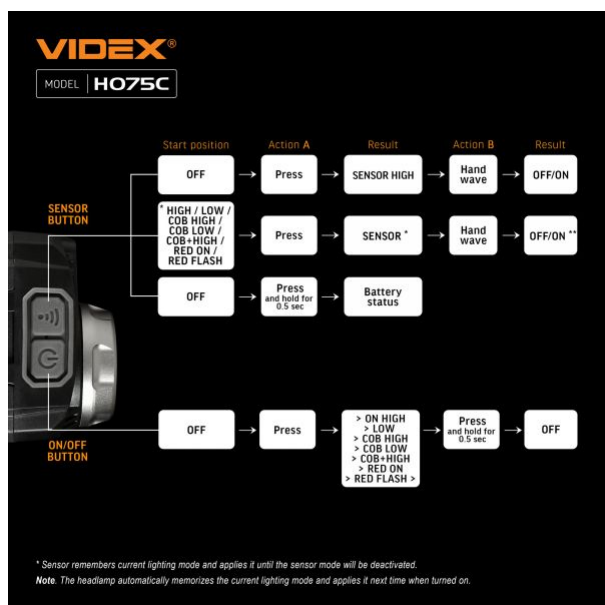

We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1.5 meters



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions