

VIDEX[®]

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C

TECHNICAL CARD



LED Headlamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 2 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrarno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Operation mode	HIGH, LOW, COB + HIGH, COB HIGH, COB LOW, RED ON, RED FLASH
Light source replaceable	no

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	5 W + COB
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	550 Lm
--	--------

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C

Peak luminous intensity	4000 cd
Correlated color temperature	5000K (neutral white)

Additional information

Housing colour	Black
Fall protection	1.5 m
Operating temperature range	-20° +40°C
Battery voltage	3.7 V, 1.5 V
Battery type	Li-ion VLF-B12, AAA disposable battery
Battery capacity	1200 mAh
Battery indicator	5 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum, Polyamide
Dimensions	
EAN	4820246483216
In the package	1 pc.
Height	45 mm
Outer box	20 pcs.
Width	60 mm
Depth	50 mm
Unit nett weight	78g

Signs marking goods

Packaging marking

CE, Utilization



VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C



VIDEX[®]

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K


INDEX: VLF-H075C



VIDEX®

VIDEX VLF-H075C 550Lm 5000K

INDEX: VLF-H075C

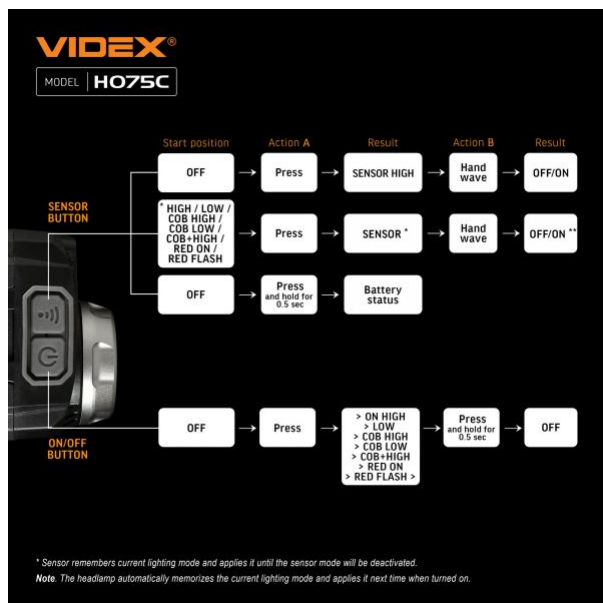

We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1.5 meters



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions