

## TECHNICAL CARD



LED Headlamp

# VIDEX®



## WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Operation mode	TURBO, HIGH, MIDDLE, LOW, COB HIGH, COB LOW, RED HIGH, RED LOW, RED FLASH
Light source replaceable	no

### Type of light source

Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	5 W
Input interface	USB-C

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	700 Lm
---	--------

## VIDEX VLF-H147 700Lm 5000K

### INDEX: VLF-H147

Correlated color temperature	5000K (neutral white)
Peak luminous intensity	11600 cd

### Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-pol
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery indicator	5 level
Battery replaceable	no
Mercury content	Does not contain
Ingress protection	IP55
Housing material	Polyamide

### Dimensions

EAN	4820246486804
Height	80 mm
Depth	45 mm
In the package	1 pc.
Outer box	20 pcs.
Width	49 mm
Unit nett weight	135g

### Signs marking goods

# VIDEX®

VIDEX VLF-H147 700Lm 5000K

INDEX: VLF-H147

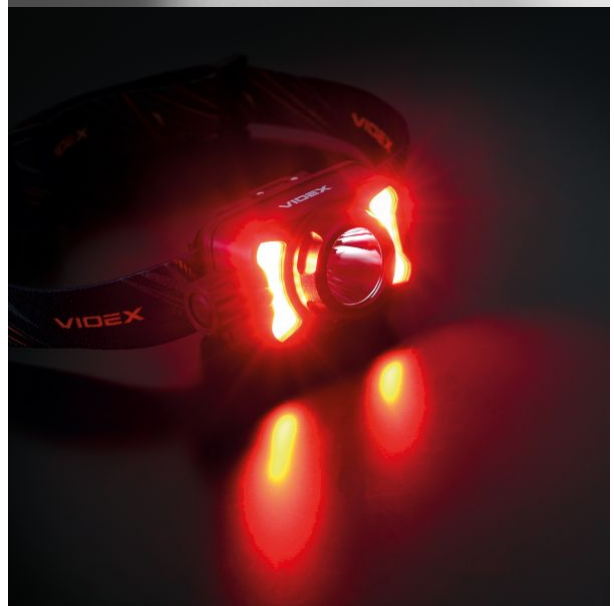
Packaging marking

CE, Utilization



**VIDEX<sup>®</sup>**

VIDEX VLF-H147 700Lm 5000K

**INDEX: VLF-H147**

**VIDEX<sup>®</sup>****VIDEX VLF-H147 700Lm 5000K****INDEX: VLF-H147**

**VIDEX<sup>®</sup>****VIDEX VLF-H147 700Lm 5000K****INDEX: VLF-H147**

# VIDEX®

VIDEX VLF-H147 700Lm 5000K

INDEX: VLF-H147



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury