

# VIDEX®


VIDEX HB01 150W 5000K 27000Lm 230V Black

INDEX: VL-HB01-1505B

## TECHNICAL CARD



LED High Bay Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX HB01 150W 5000K 27000Lm 230V Black

### INDEX: VL-HB01-1505B

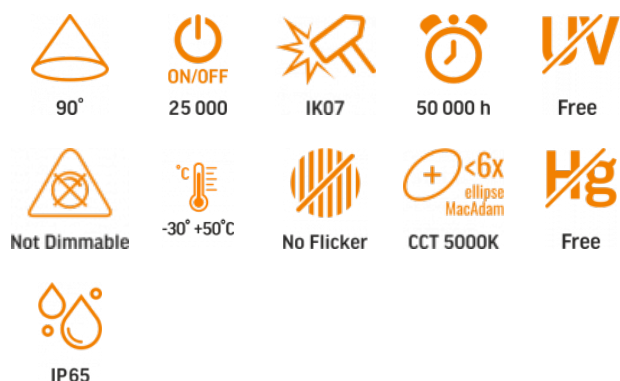

## WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Light source or containing product	Light source
Light source replaceable	no
Control gear replaceable	no

### Type of light source

Energy class of the light source	B
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	DLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS

High luminance light source	No
Anti-glare shield	No
Technology	LED

### Electrical parameters

On-mode power (Pon)	150 W
Rated voltage, frequency	AC 110-277 V, 50/60 Hz
Rated current	700 mA
Input interface	Free wire ends
Electric shock protection class	I
Displacement factor (cos φ1)	0.9
Survival factor	0.9
Energy consumption in on-mode of the light source (kWh/1000h)	150

### Photometric parameters

Luminous flux	27000 Lm
Useful luminous flux (Φuse)	25000 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	90°
Color rendering index (CRI)	Ra > 70
On/Off cycles	25000
Lifetime (L70B50)	50000 h
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359

# VIDEX®

## VIDEX HB01 150W 5000K 27000Lm 230V Black

### INDEX: VL-HB01-1505B

<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥96%
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	outdoor use
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (5000K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 89

### Additional information

<b>Place of installation</b>	Suspension
<b>Place of application</b>	indoor, outdoor
<b>Impact protection</b>	IK07
<b>Housing colour</b>	Black
<b>Diffuser material</b>	Polycarbonate (PC)
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-30° +50°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum

### Dimensions

<b>EAN</b>	4820246484817
<b>In the package</b>	1 pc.

<b>Height</b>	151 mm
<b>Outer box</b>	2 pcs.
<b>Width</b>	290 mm
<b>Depth</b>	290 mm
<b>Unit nett weight</b>	1.85kg

### Signs marking goods

#### Packaging marking

Recycling of waste, CE, Utilization



**VIDEX®**


VIDEX HB01 150W 5000K 27000Lm 230V Black

**INDEX: VL-HB01-1505B**

# VIDEX®

VIDEX HB01 150W 5000K 27000Lm 230V Black

INDEX: VL-HB01-1505B

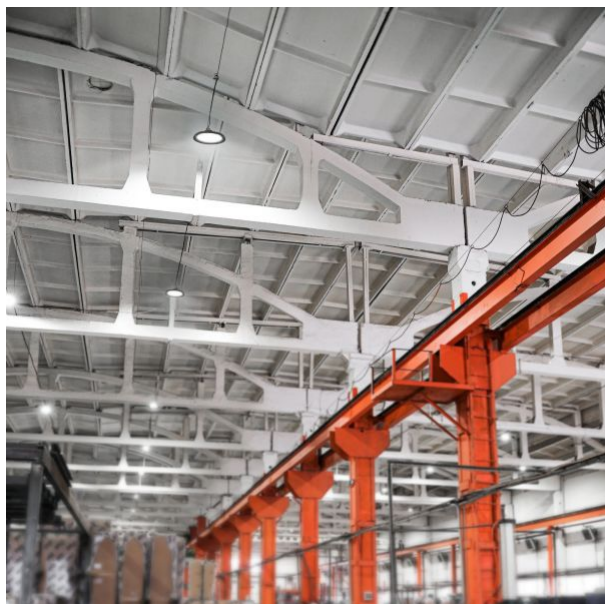

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,

30-732 Krakow, Poland.



The product must be used indoors



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



Minimum distance from the illuminated object



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



90°

Rated beam angle



25 000

Rated On/off cycles



IK07

The product withstands a medium impact (e.g., from a blunt object)



50 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Not Dimmable

The product is incompatible with light regulators



-30° +50°C

Operating temperatures range



No Flicker

The flickering of the light does not exceed the permissible level



CCT 5000K

Colour consistency in MacAdam ellipses (SDCM)



Free

The product does not contain mercury



IP65

Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions

Date: 24.06.2026