

VIDEX®

VIDEX VL-TRMS-LA76B Black

INDEX: VL-TRMS-LA76B

TECHNICAL CARD




LED Light for Magnetic slim track light system



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

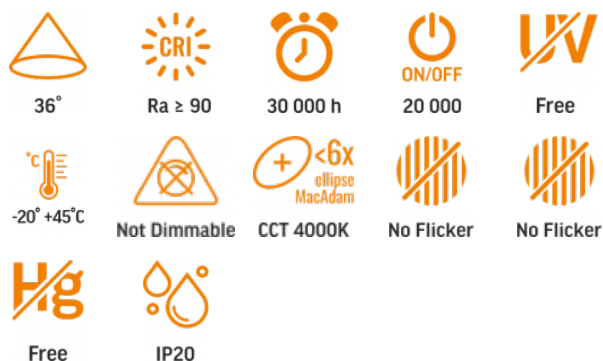

WARRANTY 3 YEARS

NEUTRAL WHITE

 4000K

Neutral White / Neutrálny biely / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
Light source or containing product	Containing product

Type of light source

Energy class of the light source	F
Dimmable	no
Directional or non-directional light source	DLS
Mains or non-mains light source	NMLS
Connected light source (cls)	no
Colour-tuneable light source (CTLS)	no
High luminance light source	No
Anti-glare shield	No

VIDEX VL-TRMS-LA76B Black

INDEX: VL-TRMS-LA76B

Technology	LED
Electrical parameters	
On-mode power (Pon)	8.5 W
Rated voltage, frequency	DC 48 V
Rated current	167 mA
Input interface	2 Wires Busbar
Electric shock protection class	III
Energy consumption in on-mode of the light source (kWh/1000h)	8.5
Displacement factor (cos φ1)	0.9
Survival factor	1
Photometric parameters	
Useful luminous flux of the light source (Φuse)	720 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	36°
Color rendering index (CRI)	Ra > 90
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a narrow cone (90°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%

VIDEX®

VIDEX VL-TRMS-LA76B Black

INDEX: VL-TRMS-LA76B

Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Stroboscopic effect metric (SVM)	≤0.4
Flicker metric (Pst LM)	≤1
CRI Min	Ra 90
CRI Max	Ra 95

In the package

1 pc.

Signs marking goods

Packaging marking

Recycling of waste, CE, Utilization

Additional information

Place of installation	Busbar for magnetic slim track
Place of application	indoor
Housing colour	Black
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-20° +45°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum alloy, Acrylic

Dimensions

EAN	4820246485715
Height	111 mm
Width	60 mm
Depth	57 mm
Outer box	32 pcs.
Unit nett weight	215g



VIDEX[®]


VIDEX VL-TRMS-LA76B Black

INDEX: VL-TRMS-LA76B

VIDEX®

VIDEX VL-TRMS-LA76B Black

INDEX: VL-TRMS-LA76B

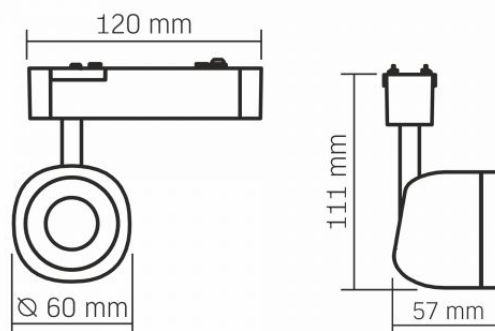

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 22.12.2024