


TECHNICAL CARD




LED Light for Magnetic slim track light system

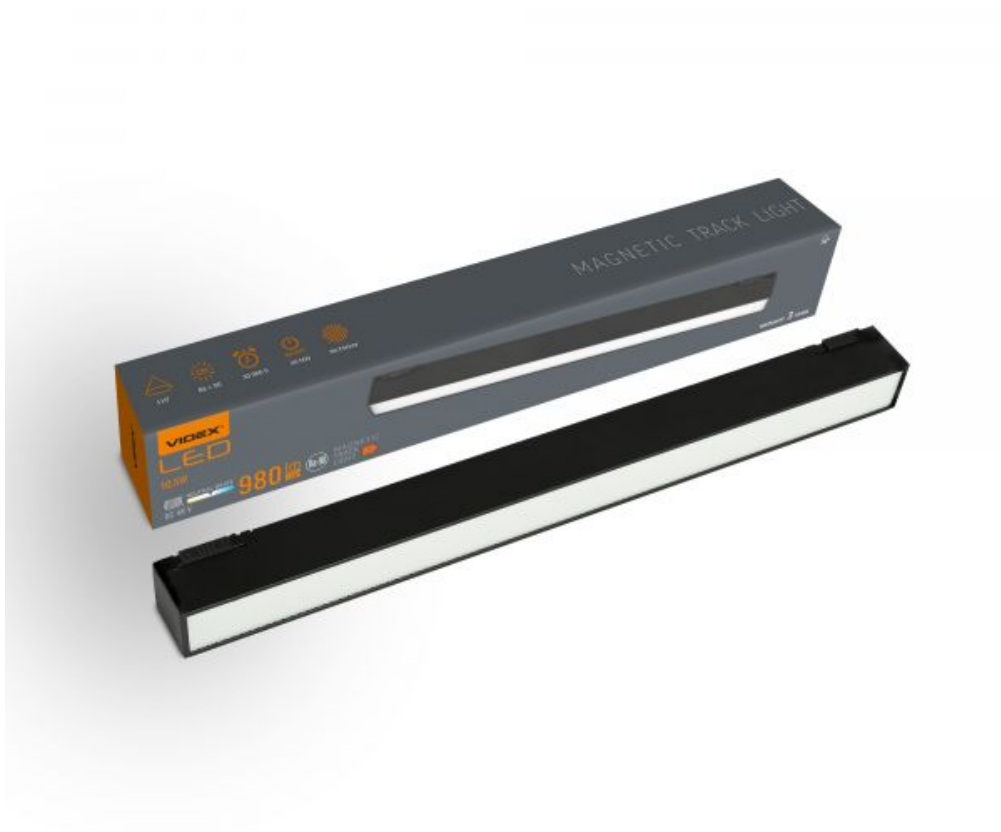

Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VL-TRMS-LD430B

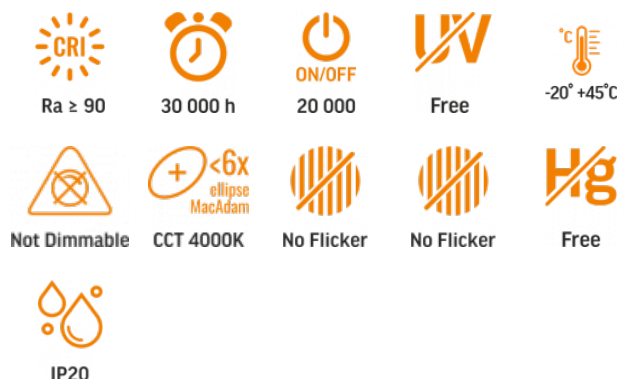

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product Light source

Light source replaceable no

Type of light source

Energy class of the light source F

Dimmable no

Directional (DLS) or non-directional (NDLS) light source DLS

Connected light source (cls) no

Color-tunable light source no

Mains (MLS) or non-mains (NMLS) light source NMLS

High luminance light source No

Anti-glare shield No

Technology LED

Electrical parameters

On-mode power (Pon) 10.5 W

Rated voltage, frequency DC 48 V

Rated current 250 mA

Input interface 2 Wires
Busbar

Electric shock protection class III

Energy consumption in on-mode of the light source (kWh/1000h) 10.5

Displacement factor (cos φ1) 0.9

Survival factor 1

Photometric parameters

Useful luminous flux of the contained light source (Φuse) 980 Lm

Correlated color temperature 4000K
(neutral white)

Beam angle 110°

Color rendering index (CRI) Ra > 90

Lifetime 30000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a wide cone (120°)

Chromaticity coordinates (x) 0.38

Chromaticity coordinates (y) 0.38

R9 colour rendering index value >0

The lumen maintenance factor ≥96%

INDEX: VL-TRMS-LD430B

Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4
CRI Min	Ra 90
CRI Max	Ra 95

Outer box	100 pcs.
Unit nett weight	140g

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------

Additional information

Place of installation	Busbar for magnetic slim track
Place of application	indoor
Housing colour	Black
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-20° +45°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum alloy, Acrylic

Dimensions

EAN	4820246485760
Height	25 mm
Width	300 mm
Depth	24 mm
In the package	1 pc.




VIDEX[®]

VIDEX VL-TRMS-LD430B Black

INDEX: VL-TRMS-LD430B

INDEX: VL-TRMS-LD430B

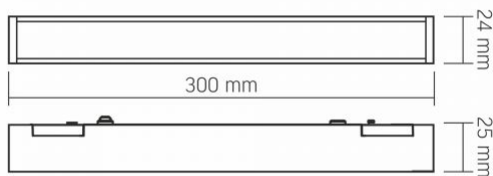

We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Minimum distance from the illuminated object



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Ra > 90 - color rendering index



— Nominal lifetime (hours)



— Rated On/off cycles



— The product does not emit ultraviolet light



— Operating temperatures range



— The product is incompatible with light regulators



— Colour consistency in MacAdam ellipses (SDCM)



— The flickering of the light does not exceed the permissible level



— The product has minimal flickering, which should not cause discomfort or danger



— The product does not contain mercury



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture