

TECHNICAL CARD




LED Light for Magnetic slim track light system



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VL-TRMS-LE29B

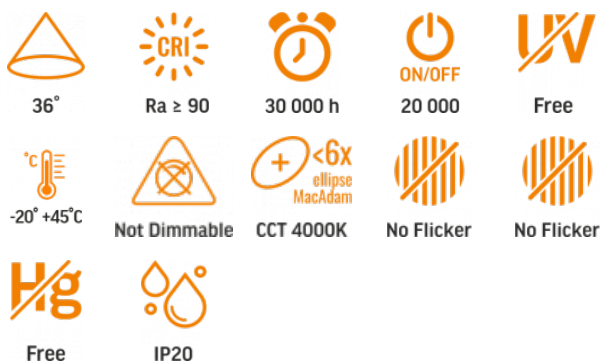

WARRANTY 3 YEARS



Neutral White / Neutrálny biely / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutraus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
Light source or containing product	Containing product

Type of light source

Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	DLS
Mains (MLS) or non-mains (NMLS) light source	NMLS
Connected light source (cls)	no
Color-tunable light source	no
High luminance light source	No
Anti-glare shield	No

Technology	LED
Energy efficiency class of the contained light source	F

Electrical parameters

On-mode power (Pon)	16 W
Rated voltage, frequency	DC 48 V
Rated current	375 mA
Input interface	2 Wires Busbar
Electric shock protection class	III
Energy consumption in on-mode of the light source (kWh/1000h)	16
Displacement factor (cos φ1)	0.9
Survival factor	1

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	1380 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	36°
Color rendering index (CRI)	Ra > 90
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a narrow cone (90°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0

INDEX: VL-TRMS-LE29B

The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4
CRI Min	Ra 90
CRI Max	Ra 95

Outer box	24 pcs.
Unit nett weight	320g

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------

Additional information

Place of installation	Busbar for magnetic slim track
Place of application	indoor
Housing colour	Black
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-20° +45°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum alloy, Acrylic

Dimensions

EAN	4820246485791
Height	77 mm
Width	78 mm
Depth	78 mm
In the package	1 pc.




VIDEX®

VIDEX VL-TRMS-LE29B Black

INDEX: VL-TRMS-LE29B

VIDEX[®]

VIDEX VL-TRMS-LE29B Black

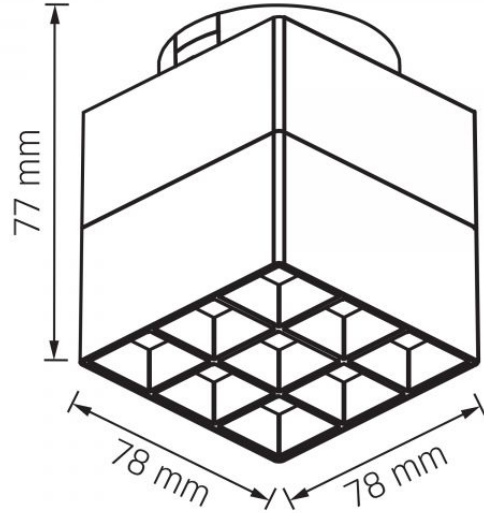INDEX: VL-TRMS-LE29B

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.