

# VIDEX®

VIDEX 24W 0.6M 5000K 2400Lm Black

INDEX: VL-BNL02-24065B

## TECHNICAL CARD




### LED Linkable Linear Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

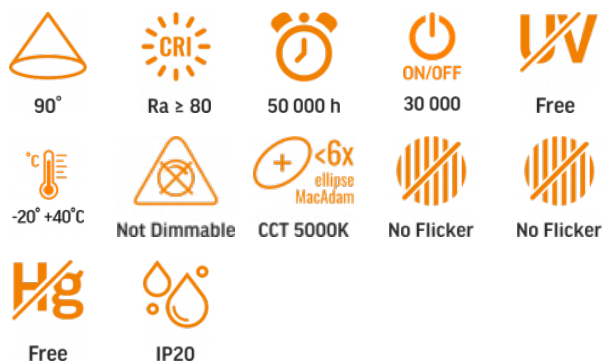

## WARRANTY 5 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

## General parameters

Control gear replaceable	by the producer
Light source replaceable	by the producer
Light source or containing product	Containing product

## Type of light source

Energy class of the light source	E
Dimmable	no
Directional or non-directional light source	DLS
Mains or non-mains light source	MLS
Connected light source (cls)	no
Colour-tuneable light source (CTLS)	no

## VIDEX 24W 0.6M 5000K 2400Lm Black

### INDEX: VL-BNL02-24065B

High luminance light source	No
Anti-glare shield	No
Technology	LED

## Electrical parameters

On-mode power (Pon)	24 W
Rated voltage, frequency	AC 170-265 V, 50/60 Hz
Rated current	121 mA
Input interface	Power plug
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	24
Displacement factor (cos φ1)	0.9
Survival factor	0.9

## Photometric parameters

Useful luminous flux of the light source (Φuse)	2400 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	90°
Color rendering index (CRI)	Ra > 80
Lifetime	50000 h
On/Off cycles	30000
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.35
Chromaticity coordinates (y)	0.36

### INDEX: VL-BNL02-24065B

<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥96%
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (5000K)
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	≤0.4
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

<b>Width</b>	55 mm
<b>Depth</b>	600 mm
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	620g
<b>In the package</b>	1 pc.

### Signs marking goods

#### Packaging marking

Recycling of  
waste, CE,  
Utilization

### Additional information

<b>Place of installation</b>	Ceiling, Recessed, Flat surface, Suspension
<b>Place of application</b>	indoor
<b>Housing colour</b>	Black
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Diffuser material</b>	Plastic
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum

### Dimensions

<b>EAN</b>	4820246485531
<b>Height</b>	55 mm



**VIDEX**<sup>®</sup>

VIDEX 24W 0.6M 5000K 2400Lm Black

**INDEX: VL-BNL02-24065B**

**VIDEX<sup>®</sup>**

VIDEX 24W 0.6M 5000K 2400Lm Black

**INDEX: VL-BNL02-24065B**

**VIDEX<sup>®</sup>**

VIDEX 24W 0.6M 5000K 2400Lm Black

**INDEX: VL-BNL02-24065B**

**VIDEX<sup>®</sup>**


VIDEX 24W 0.6M 5000K 2400Lm Black

**INDEX: VL-BNL02-24065B**

# VIDEX®

VIDEX 24W 0.6M 5000K 2400Lm Black

INDEX: VL-BNL02-24065B

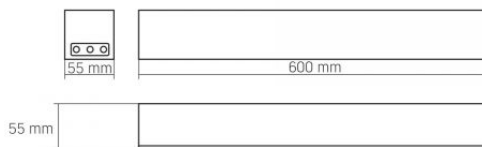

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

Date: 22.12.2024