


## TECHNICAL CARD



LED Panel



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

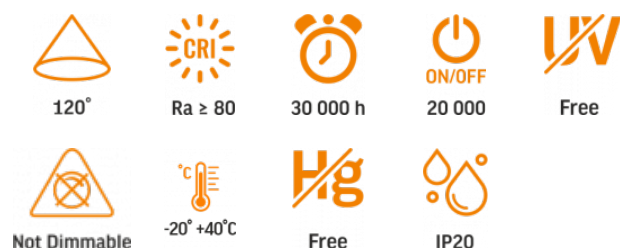**INDEX: VLE-P404W**

**WARRANTY 3 YEARS**


Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрально бяла / Bianco neutro.

**General parameters**

<b>Light source or containing product</b>	Containing product
<b>Control gear replaceable</b>	by the producer
<b>Light source replaceable</b>	by the producer

**Type of light source**

<b>Dimmable</b>	no
<b>Energy efficiency class of the contained light source</b>	D

**Electrical parameters**

<b>Rated voltage, frequency</b>	AC 175-265 V, 50/60 Hz
<b>Rated current</b>	300 mA

<b>Input interface</b>	Free wire ends
<b>Electric shock protection class</b>	II

**Photometric parameters**

<b>Correlated color temperature</b>	4000K (neutral white)
<b>Useful luminous flux of the contained light source (Φ<sub>use</sub>)</b>	5200 Lm
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>Lifetime</b>	30000 h
<b>On/Off cycles</b>	20000
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)

**Additional information**

<b>Place of installation</b>	Armstrong ceiling, Ceiling
<b>Place of application</b>	indoor
<b>Housing colour</b>	White
<b>Diffuser material</b>	Plastic
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum

**Dimensions**


# VIDEX®

**VIDEX-PANEL-LED-40W-P404W-NW**
**INDEX: VLE-P404W**

<b>EAN</b>	5904405540626
<b>Height</b>	595 mm
<b>Width</b>	595 mm
<b>Depth</b>	10.8 mm
<b>Outer box</b>	5 pcs.

## Signs marking goods

**Packaging marking** CE, Utilization

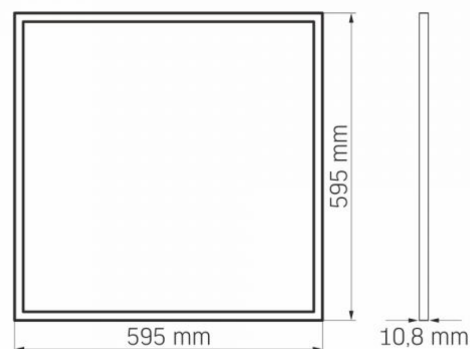

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



**INDEX: VLE-P404W**


The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Rated beam angle



— Ra > 80 – color rendering index



— Nominal lifetime (hours)



— Rated On/off cycles



— The product does not emit ultraviolet light



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture