


## TECHNICAL CARD



LED Panel



# VIDEX®

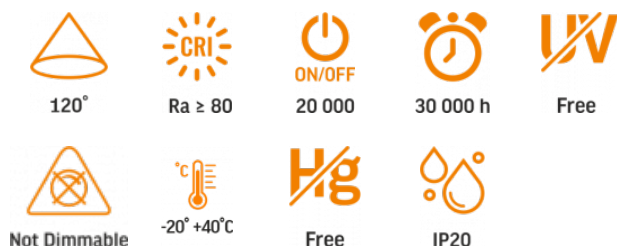**VIDEX-PANEL-LED-40W-P62-406W-CW**
**INDEX: VLE-P62-406W**


## WARRANTY 3 YEARS



Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kúlm valge.

## General parameters

<b>Light source or containing product</b>	Containing product
<b>Light source replaceable</b>	by the producer
<b>Control gear replaceable</b>	by the producer

## Type of light source

<b>Energy efficiency class of the contained light source</b>	D
<b>Dimmable</b>	no

## Electrical parameters

<b>Rated voltage, frequency</b>	AC 175-265 V, 50/60 Hz
<b>Rated current</b>	300 mA
<b>Input interface</b>	Free wire ends

**Electric shock protection class** II

## Photometric parameters

<b>Useful luminous flux of the contained light source (Φuse)</b>	5200 Lm
<b>Correlated color temperature</b>	6000K (cold white)
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	30000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)

## Additional information

<b>Place of installation</b>	Armstrong ceiling, Ceiling
<b>Place of application</b>	indoor
<b>Housing colour</b>	White
<b>Diffuser material</b>	Plastic
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum

## Dimensions


<b>EAN</b>	5904405540657
<b>Outer box</b>	5 pcs.

**VIDEX**<sup>®</sup>

VIDEX-PANEL-LED-40W-P62-406W-CW

**INDEX: VLE-P62-406W**



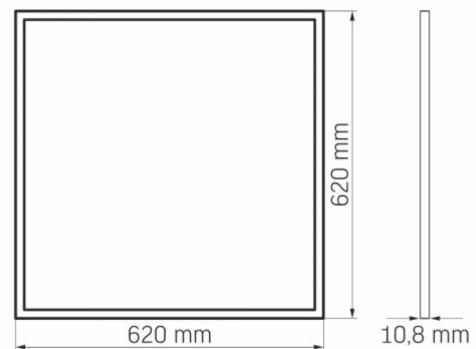








<b>Height</b>	620 mm
<b>Width</b>	620 mm
<b>Depth</b>	10.8 mm



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

## INDEX: VLE-P62-406W

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  — Rated beam angle  
120°
-  — Ra > 80 - color rendering index  
Ra ≥ 80
-  — Rated On/off cycles  
ON/OFF  
20 000
-  — Nominal lifetime (hours)  
30 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° +40°C
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture  
IP20