


## TECHNICAL CARD



LED Panel



# VIDEX®

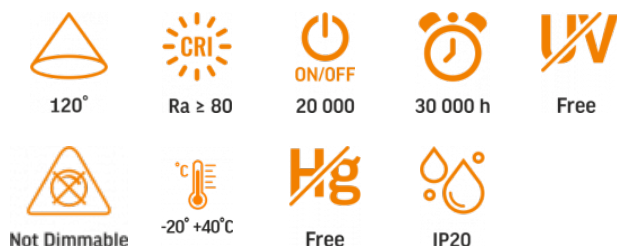**VIDEX-PANEL-LED-40W-P62-406W-CW**
**INDEX: VLE-P62-406W**


## WARRANTY 3 YEARS



Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kúlm valge.

## General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer
Control gear replaceable	by the producer

## Type of light source

Energy efficiency class of the contained light source	D
Dimmable	no

## Electrical parameters

Rated voltage, frequency	AC 175-265 V, 50/60 Hz
Rated current	300 mA
Input interface	Free wire ends

Electric shock protection class II

## Photometric parameters

Useful luminous flux of the contained light source (Φuse)	5200 Lm
Correlated color temperature	6000K (cold white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)

## Additional information

Place of installation	Armstrong ceiling, Ceiling
Place of application	indoor
Housing colour	White
Diffuser material	Plastic
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum

## Dimensions


EAN	5904405540657
Outer box	5 pcs.

**VIDEX®**

VIDEX-PANEL-LED-40W-P62-406W-CW

**INDEX: VLE-P62-406W**

<b>Height</b>	620 mm
<b>Width</b>	620 mm
<b>Depth</b>	10.8 mm

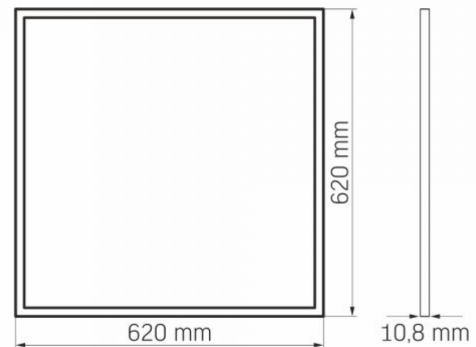

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

## INDEX: VLE-P62-406W



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



— Rated beam angle

120°



— Ra > 80 - color rendering index

Ra > 80



— Rated On/off cycles

20 000



— Nominal lifetime (hours)

30 000 h



— The product does not emit ultraviolet light

Free



— The product is incompatible with light regulators

Not Dimmable



— Operating temperatures range

-20° +40°C



— The product does not contain mercury

Free



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture

IP20