

VIDEX[®]

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

TECHNICAL CARD



LED Portable Flashlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 3 YEARS

COLD WHITE



5700K

Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hídeg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kūlm valge.

General parameters

Operation mode	HIGH, LOW, STROBE
Light source replaceable	no
Battery Warranty	1 year

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	600 Lm
Correlated color temperature	5700K (cold white)

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

Peak luminous intensity 3320 cd

Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery voltage	3.7 V
Battery capacity	800 mAh
Battery type	Li-ion 16340
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

Dimensions

EAN	4820246481045
In the package	1 pc.
Height	74.5 mm
Outer box	20 pcs.
Width	24 mm
Depth	27 mm
Unit nett weight	44g

Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055



VIDEX®

VIDEX VLF-A055 600Lm 5700K


INDEX: VLF-A055



VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

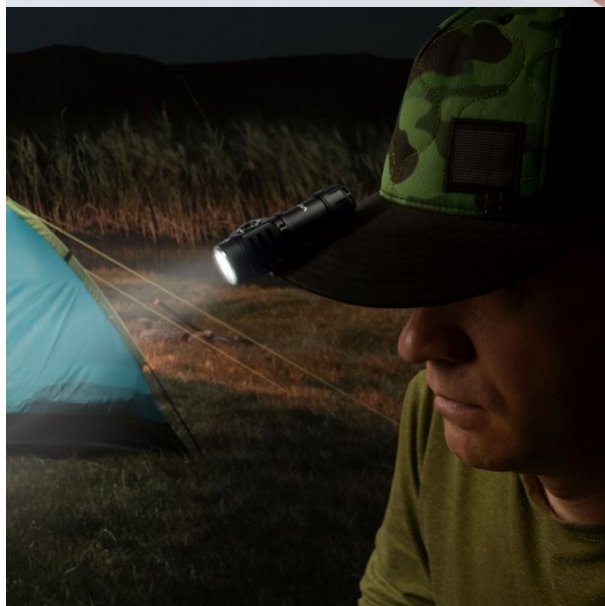

VIDEX®
MODEL | **A055**

ULTRACOMPACT RECHARGEABLE LED FLASHLIGHT



600
MAX LUMENS

- 4 LIGHTING MODES
- TYPE-C
- 2m IP68
- 1m IMPACT RESISTANCE

VIDEX®
MODEL | **A055**



LUMINUS SST20
10W
5700K

Energy efficient led provides maximum output 600 lumens, beam distance 115m and long service life up to 50000 hours.

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055



INDEX: VLF-A055

VIDEX® IP68 WATER RESISTANCE
MODEL | A055



Protection against dust and moisture IP68 allows short-term submersions under water to a depth of up to two meters.

VIDEX®
MODEL | A055



Built-in type-c port for direct charging. Charging time around 2.5 hours.

VIDEX®
MODEL | A055



Construction includes loop for a wrist lanyard. The flashlight will always be at hand.

VIDEX® METAL CLIP
MODEL | A055



For convenient attachment of the flashlight to pocket, belt or backpack.



VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

VIDEX
MODEL | A055

High-quality copper conducts current better and retains elasticity over the years compared to cheaper metals.

VIDEX
MODEL | A055

WITH BATTERY 800mAh

	HIGH	LOW	MOON	STROBE
OUTPUT	600 Lm	150 Lm	30 Lm	600 Lm
RUNTIME	1h 40min	2h 45min	13h	1h 40min
DISTANCE	115m	54m	20m	115m
INTENSITY	3320cd	640cd	300cd	3320cd

Protection against over charge, over discharge, wrong polarity.

VIDEX
MODEL | A055

PROGRAM ROOT

** The current mode memorized and applied next time when turned on.
Note: Battery indication is always on if the light is switched on.

VIDEX
MODEL | A055

KIT CONTENT

SPARE SILICONE RINGS

USER'S MANUAL, WARRANTY CARD | LI-ION BATTERY | FLASHLIGHT | LANYARD | CHARGING CABLE

SIZE 74.5x24x27mm
WEIGHT 44g (without battery)

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

VIDEX[®]

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP68

— Class of protection against dust and moisture.
The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter