

VIDEX[®]

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

TECHNICAL CARD



LED Portable Flashlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 3 YEARS



Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kūlm valge.

General parameters

| | |
|--------------------------|-------------------|
| Operation mode | HIGH, LOW, STROBE |
| Light source replaceable | no |
| Battery Warranty | 1 year |

Type of light source

| | |
|------------|-----|
| Dimmable | no |
| Technology | LED |

Electrical parameters

| | |
|---------------------|-------|
| On-mode power (Pon) | 10 W |
| Input interface | USB-C |

Photometric parameters

| | |
|--|---------|
| Useful luminous flux of the contained light source (Φ _{use}) | 600 Lm |
| Peak luminous intensity | 3320 cd |

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

Correlated color temperature 5700K (cold white)

Additional information

| | |
|-----------------------------|----------------------------|
| Housing colour | Black |
| Fall protection | 1 m |
| Operating temperature range | -20° +40°C |
| Battery voltage | 3.7 V |
| Battery type | Li-ion 16340 |
| Battery capacity | 800 mAh |
| Battery indicator | 4 level |
| Battery replaceable | yes |
| Mercury content | Does not contain |
| Ingress protection | IP68 |
| Housing material | Aviation anodized aluminum |

Dimensions

| | |
|------------------|---------------|
| EAN | 4820246481045 |
| In the package | 1 pc. |
| Height | 74.5 mm |
| Outer box | 20 pcs. |
| Width | 24 mm |
| Depth | 27 mm |
| Unit nett weight | 44g |

Signs marking goods

| | |
|-------------------|-----------------|
| Packaging marking | CE, Utilization |
|-------------------|-----------------|

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055



VIDEX®

VIDEX VLF-A055 600Lm 5700K


INDEX: VLF-A055



VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

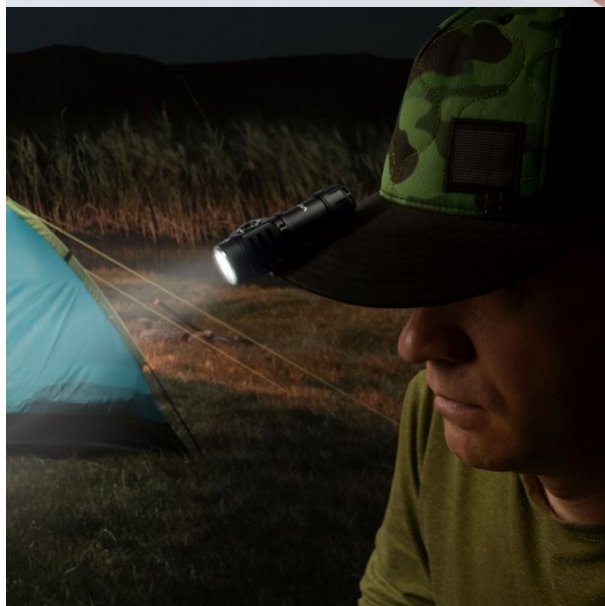

VIDEX®
MODEL | **A055**

ULTRACOMPACT RECHARGEABLE LED FLASHLIGHT



600
MAX LUMENS

- 4 LIGHTING MODES
- TYPE-C
- 2m IP68
- 1m IMPACT RESISTANCE

VIDEX®
MODEL | **A055**

LUMINUS SST20
10W
5700K

Energy efficient led provides maximum output 600 lumens, beam distance 115m and long service life up to 50000 hours.

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055



VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055





VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

VIDEX
MODEL | A055

High-quality copper conducts current better and retains elasticity over the years compared to cheaper metals.

VIDEX
MODEL | A055

WITH BATTERY 800mAh

| | HIGH | LOW | MOON | STROBE |
|-----------|----------|----------|-------|----------|
| OUTPUT | 600 Lm | 150 Lm | 30 Lm | 600 Lm |
| RUNTIME | 1h 40min | 2h 45min | 13h | 1h 40min |
| DISTANCE | 115m | 54m | 20m | 115m |
| INTENSITY | 3320cd | 640cd | 300cd | 3320cd |

Protection against over charge, over discharge, wrong polarity.

VIDEX
MODEL | A055

PROGRAM ROOT

```

graph LR
    Start[OFF] -- Action A: Click --> Result1[ON > HIGH > LOW > MOON > STROBE > OFF]
    Start -- Action B: Press and hold for 0.5 sec --> Result2[OFF]
    Start -- Action C: Press and hold for 0.5 sec --> Result3[ON]
    
```

** The current mode memorized and applied next time when turned on.
Note: Battery indication is always on if the light is switched on.

VIDEX
MODEL | A055

KIT CONTENT

SPARE SILICONE RINGS

USER'S MANUAL, WARRANTY CARD | LI-ION BATTERY | FLASHLIGHT | LANYARD | CHARGING CABLE

SIZE 74.5x24x27mm
WEIGHT 44g (without battery)

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

VIDEX[®]

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP68

— Class of protection against dust and moisture.
The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter