

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

TECHNICAL CARD



LED Portable Flashlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 3 YEARS

COLD WHITE



5700K

Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kúlm valge.

General parameters

Light source replaceable no

Type of light source

Dimmable no

Technology LED

Electrical parameters

On-mode power (Pon) 10 W

Input interface USB-C

Photometric parameters

Useful luminous flux of the light source (Φ_{use}) 600 Lm

Correlated color temperature 5700K (cold white)

Peak luminous intensity 3320 cd

Additional information

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

Dimensions

EAN	4820246481045
Height	74.5 mm
Width	24 mm
Depth	27 mm
Outer box	20 pcs.
Unit nett weight	44g
In the package	1 pc.

Signs marking goods

Packaging marking CE, Utilization

VIDEX[®]

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

VIDEX[®]


VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

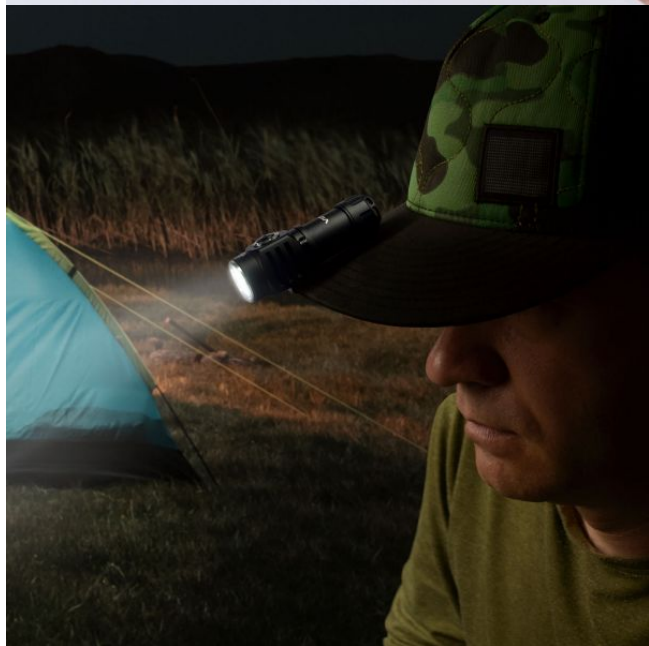

VIDEX®
MODEL | **A055**

ULTRACOMPACT RECHARGEABLE LED FLASHLIGHT

600
MAX LUMENS

- 4 LIGHTING MODES
- TYPE-C
- 2m IP68
- 1m IMPACT RESISTANCE

VIDEX®
MODEL | **A055**

LUMINUS SST20
10W
5700K

Energy efficient led provides maximum output 600 lumens, beam distance 115m and long service life up to 50000 hours.

The complex block contains two main sections. The top section features the brand name 'VIDEX' and model 'A055' in a white box, followed by the product name 'ULTRACOMPACT RECHARGEABLE LED FLASHLIGHT'. Below this is a side-view image of the flashlight. To the left of the flashlight, the text '600 MAX LUMENS' is displayed in large orange and white font. To the right, four icons represent features: '4 LIGHTING MODES', 'TYPE-C', '2m IP68', and '1m IMPACT RESISTANCE'. The bottom section features the brand name and model in another white box, followed by a close-up image of the flashlight's lens. A line points from the text 'LUMINUS SST20 10W 5700K' to the lens. At the very bottom, a paragraph describes the energy efficiency and performance of the LED.

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055



VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055



VIDEX®

IP68 WATER RESISTANCE

MODEL | A055

Protection against dust and moisture IP68 allows short-term submersions under water to a depth of up to two meters.



VIDEX®

MODEL | A055

Built-in type-c port for direct charging. Charging time around 2.5 hours.



VIDEX®

MODEL | A055

Construction includes loop for a wrist lanyard. The flashlight will always be at hand.



VIDEX®

MODEL | A055

METAL CLIP

For convenient attachment of the flashlight to pocket, belt or backpack.

VIDEX®

VIDEX VLF-A055 600Lm 5700K

INDEX: VLF-A055

VIDEX®
MODEL | A055



High-quality copper conducts current better and retains elasticity over the years compared to cheaper metals.

VIDEX®
MODEL | A055



WITH BATTERY
800mAh

	HIGH	LOW	MOON	STROBE
OUTPUT	600 Lm	150 Lm	30 Lm	600 Lm
RUNTIME	1h 40min	2h 45min	13h	1h 40min
DISTANCE	115m	54m	20m	115m
INTENSITY	3320cd	640cd	300cd	3320cd

Protection against over charge, over discharge, wrong polarity.

VIDEX®
MODEL | A055

PROGRAM ROOT



** The current mode memorized and applied next time when turned on.
Note. Battery indication is always on if the light is switched on.

VIDEX®
MODEL | A055

KIT CONTENT

SPARE SILICONE RINGS



USER'S MANUAL, WARRANTY CARD LI-ION BATTERY FLASHLIGHT LANYARD CHARGING CABLE

SIZE 74.5x24x27mm
WEIGHT 44g (without battery)

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 22.12.2024