

TECHNICAL CARD



LED Portable Flashlight

VIDEX®



WARRANTY 3 YEARS



Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kūlm valge.

General parameters

Operation mode	HIGH, LOW, STROBE
Light source replaceable	no

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	600 Lm
Correlated color temperature	5700K (cold white)
Peak luminous intensity	3320 cd

VIDEX VLF-A055H 600Lm 5700K

INDEX: VLF-A055H

Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 16340
Battery voltage	3.7 V
Battery capacity	800 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

Dimensions

EAN	4820246481038
Height	74.5 mm
Depth	27 mm
Width	24 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	79g

Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------


VIDEX®**VIDEX VLF-A055H 600Lm 5700K****INDEX: VLF-A055H**

VIDEX[®]**VIDEX VLF-A055H 600Lm 5700K****INDEX: VLF-A055H**

VIDEX[®]

VIDEX VLF-A055H 600Lm 5700K

INDEX: VLF-A055H

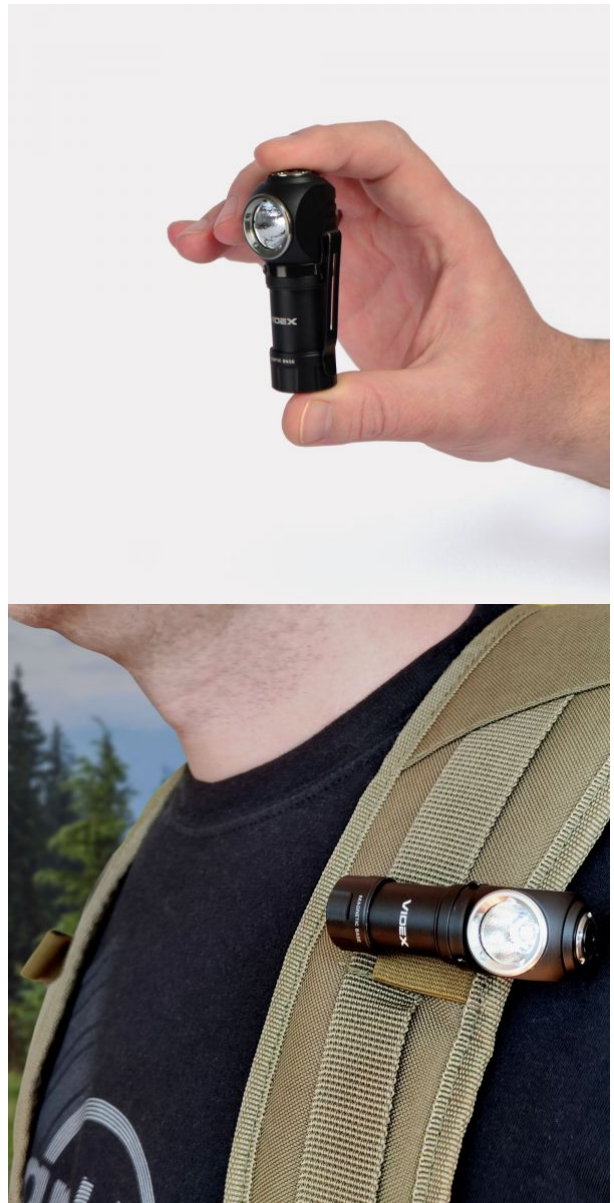

VIDEX®

VIDEX VLF-A055H 600Lm 5700K

INDEX: VLF-A055H



VIDEX®

VIDEX VLF-A055H 600Lm 5700K

INDEX: VLF-A055H



VIDEX®

VIDEX VLF-A055H 600Lm 5700K

INDEX: VLF-A055H



VIDEX®

VIDEX VLF-A055H 600Lm 5700K

INDEX: VLF-A055H

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter

MODEL **A055H**

PROGRAM ROOT

Start position	Action A	Result	Action B	Result
OFF	Click	> ON > HIGH > LOW > MOON > STROBE > OFF >		
** HIGH / LOW / MOON / STROBE	Press and hold for 0.5 sec	OFF **	Press and hold for 0.5 sec	ON **

** The current mode memorized and applied next time when turned on.
Note. Battery indication is always on if the light is switched on.

MODEL **A055H**

KIT CONTENT

USER'S MANUAL, WARRANTY CARD.

LI-ION BATTERY

FLASHLIGHT

HEADBAND

FAST RELEASE HEAD HOLDER

SIZE 74.5x23x27mm
WEIGHT 79g (with headband, without battery)