

## TECHNICAL CARD



LED Portable Flashlight

# VIDEX®



## WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Operation mode	HIGH, LOW, MOON, STROBE
Light source replaceable	no
Battery Warranty	1 year

### Type of light source

Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	300 Lm
---	--------

## VIDEX VLF-A351 300Lm 5000K

### INDEX: VLF-A351

Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1384 cd

### Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 16340
Battery voltage	3.7 V
Battery capacity	800 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP66
Housing material	Anodized aluminum

### Dimensions

EAN	4820246485005
Height	86 mm
Depth	24 mm
In the package	1 pc.
Outer box	40 pcs.
Width	24 mm
Unit nett weight	51g

# VIDEX®

## VIDEX VLF-A351 300Lm 5000K

### INDEX: VLF-A351

#### Signs marking goods

#### Packaging marking

CE, Utilization



**VIDEX®**

VIDEX VLF-A351 300Lm 5000K


**INDEX: VLF-A351**

**VIDEX<sup>®</sup>****VIDEX VLF-A351 300Lm 5000K****INDEX: VLF-A351**

# VIDEX®

## VIDEX VLF-A351 300Lm 5000K

### INDEX: VLF-A351

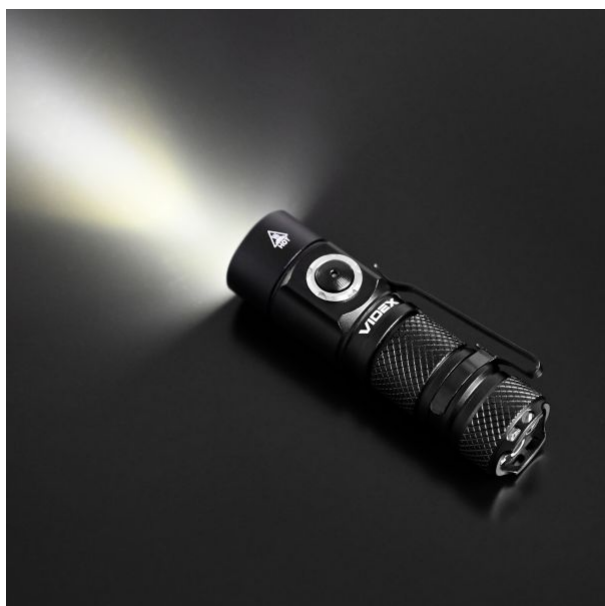

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



Not Dimmable

— The product is incompatible with light regulators



-20°C +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP66

— Class of protection against dust and moisture. The product has full protection against dust and powerful water jets