

## TECHNICAL CARD



LED Portable Flashlight

# VIDEX®



## WARRANTY 3 YEARS

### NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

### General parameters

**Light source replaceable** no

### Type of light source

**Dimmable** no

**Technology** LED

### Electrical parameters

**On-mode power (Pon)** 20 W

**Input interface** USB-C

### Photometric parameters

**Useful luminous flux of the contained light source (Φuse)** 5500 Lm

**Correlated color temperature** 5000K (neutral white)

**Peak luminous intensity** 20800 cd

## VIDEX VLF-A505C 5500Lm 5000K

### INDEX: VLF-A505C

### Additional information

<b>Housing colour</b>	Black
<b>Fall protection</b>	1 m
<b>Operating temperature range</b>	-20° +40°C
<b>Battery type</b>	Li-ion 21700, Li-ion 18650
<b>Battery voltage</b>	3.7 V
<b>Battery capacity</b>	4000 mAh
<b>Battery indicator</b>	4 level
<b>Battery replaceable</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP68
<b>Housing material</b>	Aviation anodized aluminum

### Dimensions

<b>EAN</b>	4820246483209
<b>Height</b>	144 mm
<b>Depth</b>	26 mm
<b>Width</b>	49 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	163g

### Signs marking goods

**Packaging marking** CE, Utilization

**VIDEX<sup>®</sup>**

VIDEX VLF-A505C 5500Lm 5000K

**INDEX: VLF-A505C**

**VIDEX<sup>®</sup>**

VIDEX VLF-A505C 5500Lm 5000K

**INDEX: VLF-A505C**

# VIDEX®

VIDEX VLF-A505C 5500Lm 5000K

INDEX: VLF-A505C



**VIDEX®**  
MODEL | A505C

EXTRA HIGH POWER  
RECHARGEABLE FLASHLIGHT

**5500**  
MAXI LUMENS

- LONG-RANGE BEAM 500M
- FLUX STABILIZATION
- IP68
- 1m SHOCKPROOF

**VIDEX®**  
MODEL | A505C

4X LUMINUS SST40  
20W  
5000K (Neutral white)

Excellent performance with four powerful LED chips. Maximum luminous flux 5500 Lumen, long-range beam distance up to 500 meters and high intensity 20800cd.



# VIDEX®

## VIDEX VLF-A505C 5500Lm 5000K

### INDEX: VLF-A505C



### INDEX: VLF-A505C

**VIDEX®**  
MODEL | **A505C**

INTEGRATED FOUR-LEVEL LED BATTERY INDICATOR



CHARGE 100-85%    CHARGE 85-50%    CHARGE 50-25%    CHARGE 25-1%

**VIDEX®**  
MODEL | **A505C**

PROTECTION GRADE IP68



The flashlight can work stably when immersed for 30 minutes at a depth of up to 2 meters.

**VIDEX®**  
MODEL | **A505C**

FAST CHARGE PORT TYPE-C



Charge the battery 4000mAh directly inside the flashlight for around 2.5 hours. Silicone cover protects the charging port from dust and water.



**VIDEX®**  
MODEL | **A505C**

TEMPERED GLASS




Tempered glass withstands high temperatures, is resistant to scratches, and is not subject to yellowing.

# VIDEX®

## VIDEX VLF-A505C 5500Lm 5000K

### INDEX: VLF-A505C

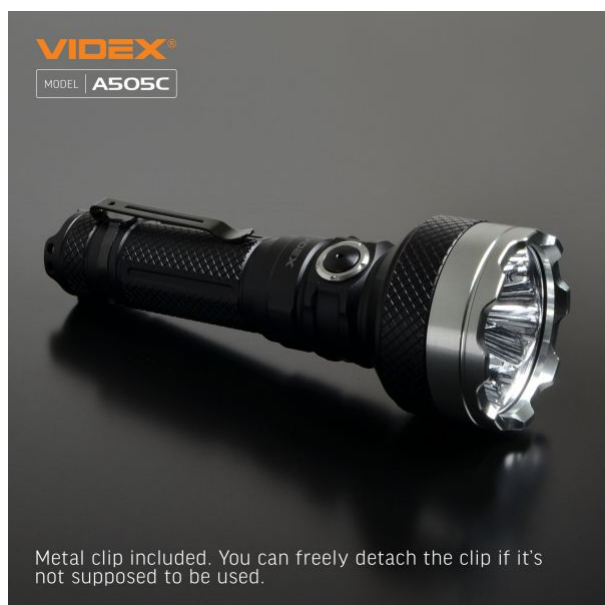

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



# VIDEX®

VIDEX VLF-A505C 5500Lm 5000K

**INDEX: VLF-A505C**



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP68

— Class of protection against dust and moisture. The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter