

TECHNICAL CARD



LED Recessed Panel



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



Ra ≥ 80

ON/OFF
20 000

50 000 h



Free



Not Dimmable



-20° +40°C



CCT 4000K



Free



IP20

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer
Control gear replaceable	by the producer

Type of light source

Energy efficiency class of the contained light source	D
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	NMLS

VIDEX-PANEL-LED-40W-PB404W-NW

INDEX: VLE-PB404W

High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	250 mA
Input interface	Terminal block
Electric shock protection class	II
Displacement factor (cos φ1)	-
Survival factor	0.9
Energy consumption in on-mode of the light source (kWh/1000h)	40

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	5100 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	160°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	50000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0

INDEX: VLE-PB404W

The lumen maintenance factor	≥96%
Flicker metric (Pst LM)	-
Stroboscopic effect metric (SVM)	-
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
CRI Min	Ra 80
CRI Max	Ra 89

Width	595 mm
Depth	28 mm
Unit nett weight	1.31kg

Signs marking goods

Packaging marking


Recycling of waste, CE, Utilization

Additional information



Place of installation	Armstrong ceiling, Ceiling
Place of application	indoor
Housing colour	White
Diffuser material	Polystyrene (PS)
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum, Iron alloy, Acrylic

Dimensions

EAN	5904405542408
In the package	2 pc.
Outer box	8 pcs.
Height	595 mm

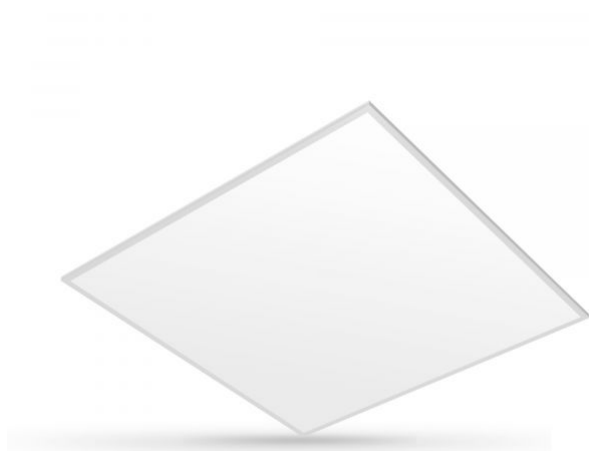

INDEX: VLE-PB404W

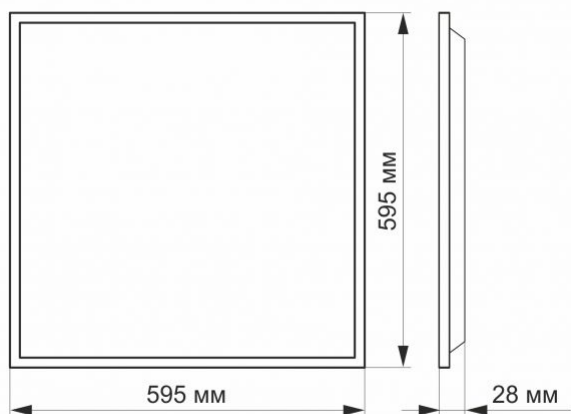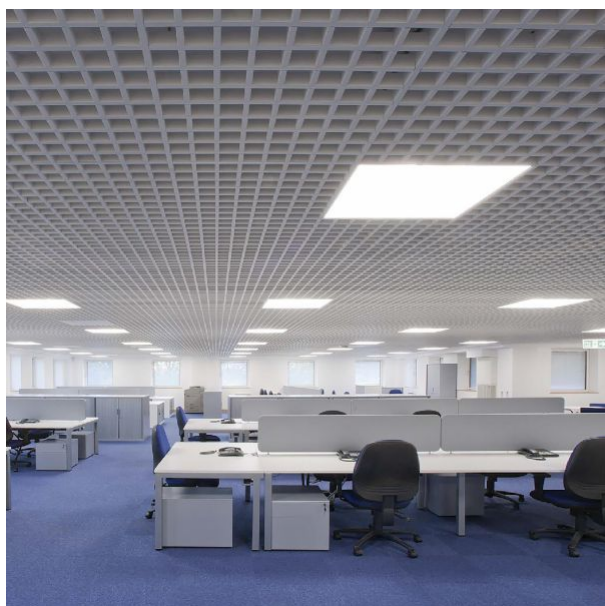

We reserve the right to make technical

changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Ra ≥ 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



50 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



CCT 4000K

— Colour consistency in MacAdam ellipses (SDCM)



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture