

## TECHNICAL CARD



LED RECHARGEABLE NIGHT LIGHT with MOTION SENSOR



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



120°



Ra ≥ 80



Free



-20° +40°C



Dimmable



Free



IP20

## WARRANTY 2 YEARS

### General parameters

|                          |    |
|--------------------------|----|
| Light source replaceable | no |
|--------------------------|----|

### Type of light source

|          |     |
|----------|-----|
| Dimmable | yes |
|----------|-----|

|            |     |
|------------|-----|
| Technology | LED |
|------------|-----|

### Electrical parameters

|                     |       |
|---------------------|-------|
| On-mode power (Pon) | 0.8 W |
|---------------------|-------|

|                 |       |
|-----------------|-------|
| Input interface | USB-C |
|-----------------|-------|

|                                 |     |
|---------------------------------|-----|
| Electric shock protection class | III |
|---------------------------------|-----|

### Photometric parameters

|  |       |
|--|-------|
| Useful luminous flux of the light source (Φ <sub>use</sub> ) | 50 Lm |
|--|-------|

|                              |   |
|------------------------------|---|
| Correlated color temperature | 6500K (cold white), 4500K (neutral white), 3000K (warm white) |
|------------------------------|---|

|            |      |
|------------|------|
| Beam angle | 120° |
|------------|------|

|                             |         |
|-----------------------------|---------|
| Color rendering index (CRI) | Ra > 80 |
|-----------------------------|---------|

## VIDEX VL-NL053W-S

### INDEX: VL-NL053W-S

|         |       |
|---------|-------|
| CRI Min | Ra 80 |
|---------|-------|

|         |       |
|---------|-------|
| CRI Max | Ra 88 |
|---------|-------|

### Additional information

|                      |        |
|----------------------|--------|
| Place of application | indoor |
|----------------------|--------|

|                |       |
|----------------|-------|
| Housing colour | White |
|----------------|-------|

|                       |    |
|-----------------------|----|
| Ultraviolet radiation | no |
|-----------------------|----|

|               |     |
|---------------|-----|
| Motion sensor | yes |
|---------------|-----|

|             |     |
|-------------|-----|
| Sensor type | PIR |
|-------------|-----|

|                        |      |
|------------------------|------|
| Sensor detection angle | 120° |
|------------------------|------|

|                   |      |
|-------------------|------|
| Sensor time delay | 20 s |
|-------------------|------|

|                           |      |
|---------------------------|------|
| Sensor detection distance | ≤6 m |
|---------------------------|------|

|                             |            |
|-----------------------------|------------|
| Operating temperature range | -20° +40°C |
|-----------------------------|------------|

|                 |                  |
|-----------------|------------------|
| Mercury content | Does not contain |
|-----------------|------------------|

|                    |      |
|--------------------|------|
| Ingress protection | IP20 |
|--------------------|------|

|                  |     |
|------------------|-----|
| Housing material | ABS |
|------------------|-----|

### Dimensions

|     |               |
|-----|---------------|
| EAN | 4820246486460 |
|-----|---------------|

|        |        |
|--------|--------|
| Height | 110 mm |
|--------|--------|

|       |       |
|-------|-------|
| Width | 45 mm |
|-------|-------|

|       |       |
|-------|-------|
| Depth | 19 mm |
|-------|-------|

|                |       |
|----------------|-------|
| In the package | 1 pc. |
|----------------|-------|

|           |         |
|-----------|---------|
| Outer box | 24 pcs. |
|-----------|---------|

|                  |     |
|------------------|-----|
| Unit nett weight | 77g |
|------------------|-----|

### Signs marking goods

**VIDEX**<sup>®</sup>

VIDEX VL-NL053W-S

**INDEX: VL-NL053W-S****Packaging marking**Recycling of  
waste, CE,  
Utilization

# VIDEX®

VIDEX VL-NL053W-S

INDEX: VL-NL053W-S




  
MAGNETIC  
FASTENING



# VIDEX®

## VIDEX VL-NL053W-S

### INDEX: VL-NL053W-S

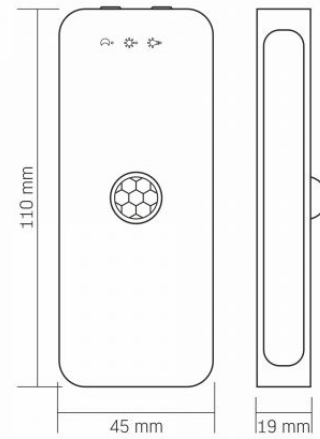

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

Date: 31.01.2025