

TECHNICAL CARD



LED Solar Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



90°



Ra ≥ 80



30 000 h

ON/OFF
20 000

IK07



-20°C +50°C



Dimmable



Free



IP65

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
--------------------------	----

Type of light source

Dimmable	yes
----------	-----

Technology	LED
------------	-----

Electrical parameters

Cable length	1 m
--------------	-----

Electric shock protection class	III
---------------------------------	-----

Photometric parameters

Useful luminous flux of the light source (Φ _{use})	1000 Lm
--	---------

Correlated color temperature	5000K (neutral white)
------------------------------	--------------------------

VIDEX VL-FS02-505

INDEX: VL-FS02-505

Beam angle	90°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359

Additional information

Place of installation	Flat surface, Wall
Vertical adjustment range	180°
Place of application	outdoor
Impact protection	IK07
Housing colour	Gray
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Motion sensor	no
Operating temperature range	-20° +50°C
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions

EAN	4820118298924
Height	207 mm
Width	160 mm
Depth	22.5 mm

VIDEX®

VIDEX VL-FS02-505

INDEX: VL-FS02-505

Outer box


10 pcs.



VIDEX[®]


VIDEX VL-FS02-505

INDEX: VL-FS02-505

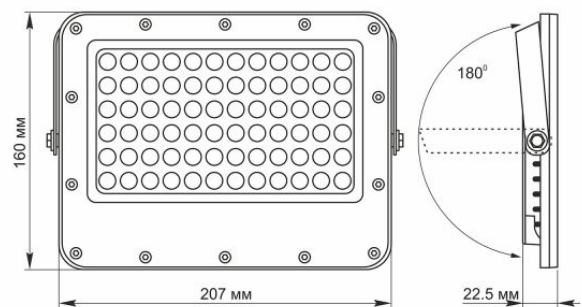

VIDEX[®]

VIDEX VL-FS02-505

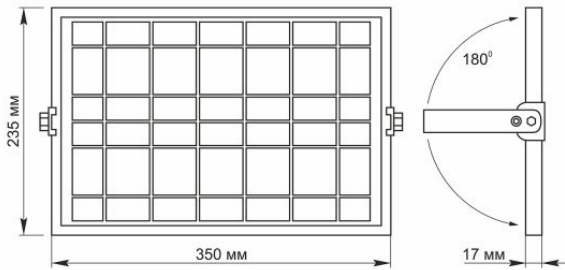INDEX: VL-FS02-505

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.