

VIDEX®

VIDEX 30W 5000K

INDEX: VL-FSO-1005

TECHNICAL CARD



LED Solar Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



90°



Ra ≥ 80



30 000 h

ON/OFF
20 000

IK07



-20°C +50°C



Dimmable



Free



IP65

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

| | |
|--------------------------|----|
| Light source replaceable | no |
|--------------------------|----|

Type of light source

| | |
|----------|-----|
| Dimmable | yes |
|----------|-----|

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Electrical parameters

| | |
|--------------|-----|
| Cable length | 1 m |
|--------------|-----|

| | |
|---------------------------------|-----|
| Electric shock protection class | III |
|---------------------------------|-----|

Photometric parameters

| | |
|--|---------|
| Useful luminous flux of the contained light source (Φ _{use}) | 2800 Lm |
|--|---------|

| | |
|------------------------------|--------------------------|
| Correlated color temperature | 5000K (neutral white) |
|------------------------------|--------------------------|

VIDEX 30W 5000K

INDEX: VL-FSO-1005

| | |
|-----------------------------|---------|
| Beam angle | 90° |
| Color rendering index (CRI) | Ra > 80 |
| Lifetime | 30000 h |
| On/Off cycles | 20000 |

Additional information

| | |
|--|--------------------|
| Place of installation | Flat surface, Wall |
| Vertical adjustment range | 180° |
| Place of application | outdoor |
| Impact protection | IK07 |
| Housing colour | Gray |
| Minimum distance from the illuminated object | 0.5 m |
| Diffuser material | Polycarbonate (PC) |
| Motion sensor | no |
| Operating temperature range | -20° +50°C |
| Mercury content | Does not contain |
| Ingress protection | IP65 |
| Housing material | Aluminum alloy |

Dimensions

| | |
|----------------|---------------|
| EAN | 4820118298948 |
| Height | 282 mm |
| Width | 250 mm |
| Depth | 42 mm |
| In the package | 1 pc. |
| Outer box | 3 pcs. |

VIDEX®


VIDEX 30W 5000K


INDEX: VL-FSO-1005

Unit nett weight 4.3kg

Signs marking goods

Packaging marking CE, Utilization

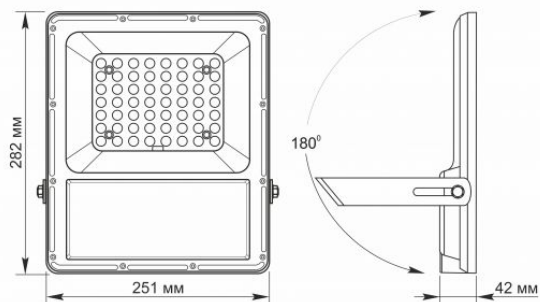

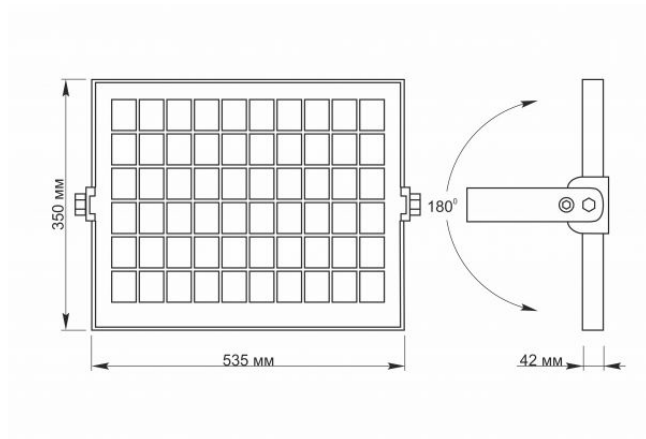INDEX: VL-FSO-1005

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.