

TECHNICAL CARD



LED Solar Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



90°



Ra ≥ 80



30 000 h

ON/OFF
20 000

IK07



Dimmable



-20°C +50°C



Free



IP65

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrалno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable yes

Technology LED

Electrical parameters

Cable length 1 m

Electric shock protection class III

Displacement factor (cos φ1) -

Photometric parameters

Luminous flux 2800 Lm

VIDEX 30W 5000K

INDEX: VL-FSO-1005

Correlated color temperature	5000K (neutral white)
Beam angle	90°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000

Additional information

Battery power	100 W
Place of installation	Flat surface, Wall
Vertical adjustment range	180°
Place of application	outdoor
Impact protection	IK07
Housing colour	Gray
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Motion sensor	no
Operating temperature range	-20° +50°C
Battery type	LiFePO4
Battery voltage	3.2 V
Battery capacity	30000 mAh
Battery replaceable	no
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

VIDEX®

VIDEX 30W 5000K

INDEX: VL-FSO-1005

Dimensions

EAN	4820118298948
Width	250 mm
Height	282 mm
Depth	42 mm
In the package	1 pc.
Outer box	3 pcs.
Unit nett weight	4.3kg

Signs marking goods**Packaging marking**

CE, Utilization





VIDEX®

VIDEX 30W 5000K

INDEX: VL-FSO-1005

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

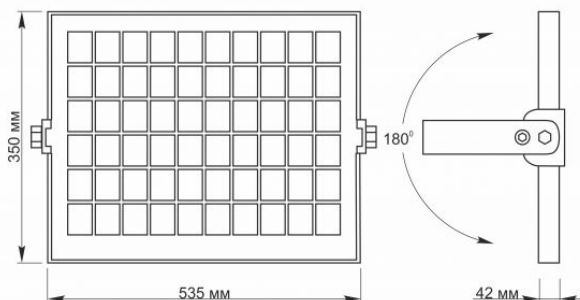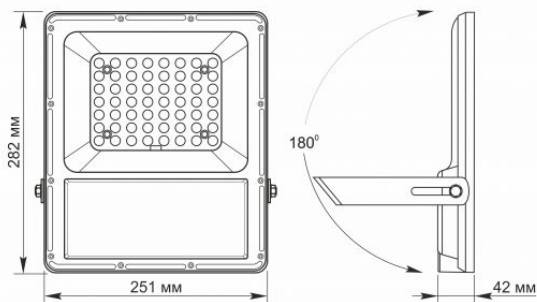

The product must be used outdoors



Minimum distance from the illuminated object



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Rated beam angle



Ra > 80 - color rendering index



Nominal lifetime (hours)



Rated On/off cycles



The product withstands a medium impact (e.g., from a blunt object)



The product supports brightness adjustment



Operating temperatures range



The product does not contain mercury



Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions