

TECHNICAL CARD



LED Solar Floodlight




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW

INDEX: VLE-FSO-205-S

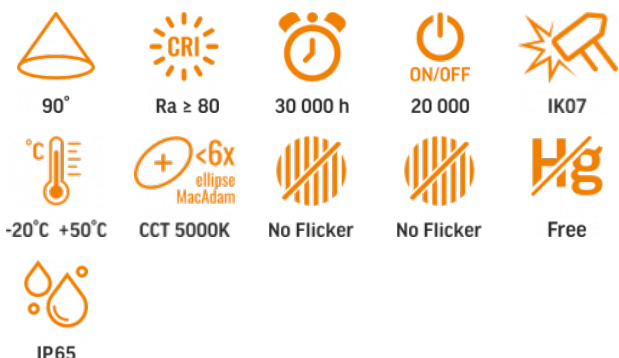

WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable remote controller

Technology LED

Electrical parameters

Cable length 1 m

Electric shock protection class III

Survival factor 1

Photometric parameters

Useful luminous flux of the light source (Φuse)	600 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	90°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
Stroboscopic effect metric (SVM)	≤0.4
Flicker metric (Pst LM)	≤1
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation Flat surface, Wall

Vertical adjustment range 180°

Place of application outdoor

Impact protection IK07

Housing colour Gray

Minimum distance from the illuminated object 0.5 m

Diffuser material Polycarbonate (PC)

Motion sensor no

Operating temperature range -20° +50°C

VIDEX®

VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW

INDEX: VLE-FSO-205-S

Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions

EAN	5904405542354
Height	145 mm
Width	128 mm
Depth	42 mm
Outer box	5 pcs.
Unit nett weight	1780g
In the package	1 pc.

Signs marking goods



Packaging marking	CE, Utilization
--------------------------	-----------------



VIDEX[®]

VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW

INDEX: VLE-FSO-205-S

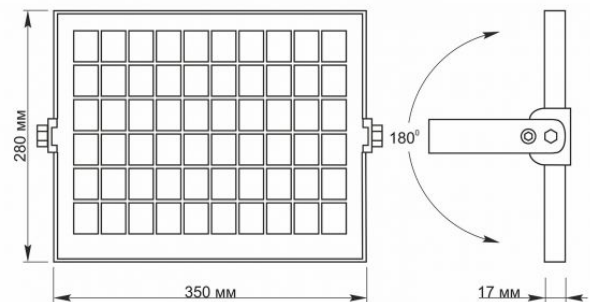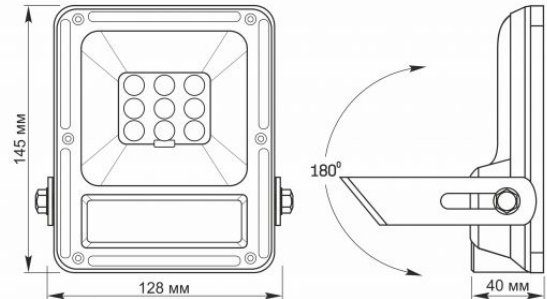

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.