

## TECHNICAL CARD



LED Solar Floodlight




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW

### INDEX: VLE-FSO-205-S

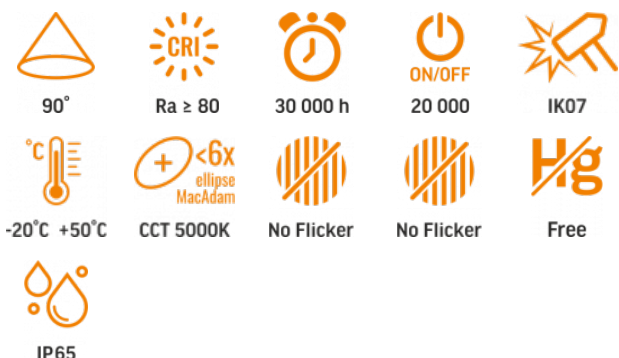

## WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

**Light source replaceable** no

## Type of light source

**Dimmable** remote controller

**Technology** LED

## Electrical parameters

**Cable length** 1 m

**Electric shock protection class** III

**Survival factor** 1

## Photometric parameters

<b>Useful luminous flux of the light source (Φuse)</b>	600 Lm
<b>Correlated color temperature</b>	5000K (neutral white)
<b>Beam angle</b>	90°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>Lifetime</b>	30000 h
<b>On/Off cycles</b>	20000
<b>Chromaticity coordinates (x)</b>	0.34
<b>Chromaticity coordinates (y)</b>	0.359
<b>R9 colour rendering index value</b>	>0
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (5000K)
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	≤0.4
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

## Additional information

**Place of installation** Flat surface, Wall

**Vertical adjustment range** 180°

**Place of application** outdoor

**Housing colour** Gray

**Impact protection** IK07

**Minimum distance from the illuminated object** 0.5 m

**Diffuser material** Polycarbonate (PC)

**Motion sensor** no

**Operating temperature range** -20° +50°C

# VIDEX®

## VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW

### INDEX: VLE-FSO-205-S

<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum alloy

### Dimensions

<b>EAN</b>	5904405542354
<b>Height</b>	145 mm
<b>Width</b>	128 mm
<b>Depth</b>	42 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	5 pcs.
<b>Unit nett weight</b>	1780g

### Signs marking goods



<b>Packaging marking</b>	CE, Utilization
--------------------------	-----------------



# VIDEX®

## VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW

### INDEX: VLE-FSO-205-S

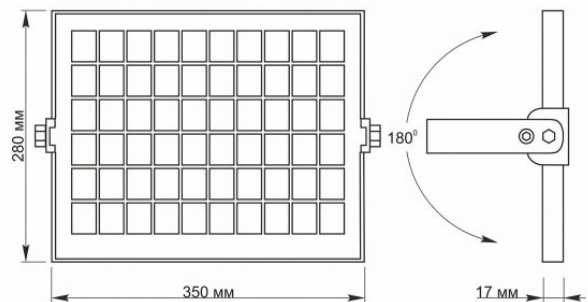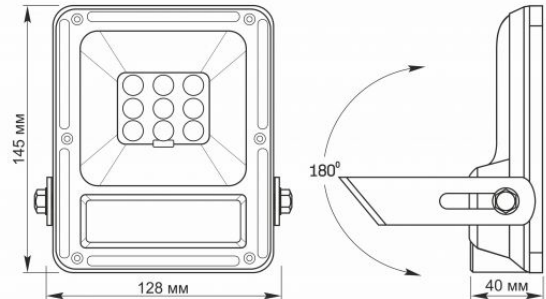

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

Date: 21.01.2025