

## TECHNICAL CARD



LED Solar Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



90°



Ra ≥ 80



30 000 h

ON/OFF  
20 000

IK07



-20°C +50°C



Dimmable



Free



IP65

## WARRANTY 2 YEARS

### NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

### General parameters

Light source replaceable	no
--------------------------	----

### Type of light source

Dimmable	yes
----------	-----

### Electrical parameters

Cable length	1 m
--------------	-----

Electric shock protection class	III
---------------------------------	-----

### Photometric parameters

Useful luminous flux of the light source (Φ <sub>use</sub> )	600 Lm
--	--------

Correlated color temperature	5000K (neutral white)
------------------------------	--------------------------

Beam angle	90°
------------	-----

## VIDEX-FLOOD-LED-SOLAR-GELIO-20W-NW

### INDEX: VL-FSO-205

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

Lifetime	30000 h
----------	---------

On/Off cycles	20000
---------------	-------

### Additional information

Place of installation	Flat surface, Wall
-----------------------	--------------------

Vertical adjustment range	180°
---------------------------	------

Place of application	outdoor
----------------------	---------

Impact protection	IK07
-------------------	------

Housing colour	Gray
----------------	------

Minimum distance from the illuminated object	0.5 m
--	-------

Diffuser material	Polycarbonate (PC)
-------------------	--------------------

Motion sensor	no
---------------	----

Operating temperature range	-20° +50°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP65
--------------------	------

Housing material	Aluminum alloy
------------------	----------------

### Dimensions

EAN	4820118298924
-----	---------------

Height	145 mm
--------	--------

Width	128 mm
-------	--------


Depth	40 mm
-------	-------


Outer box	5 pcs.
-----------	--------

# VIDEX®

## VIDEX-FLOOD-LED-SOLAR-GELIO-20W-NW

### INDEX: VL-FSO-205

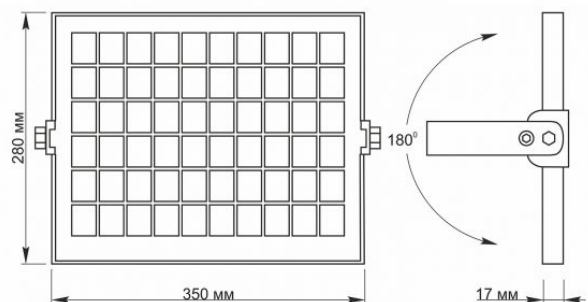

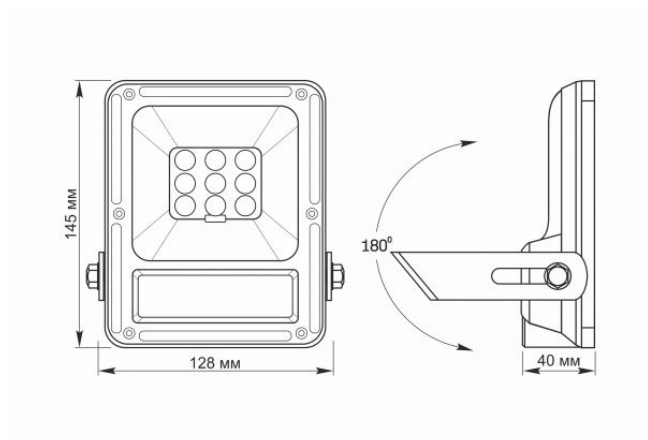**INDEX: VL-FSO-205**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.