

TECHNICAL CARD



LED Solar Street light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



90×130°



Ra ≥ 80



30 000 h



20 000



IK07



-20°C +50°C



Not Dimmable



Free



IP65

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutraus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
--------------------------	----

Type of light source

Dimmable	no
----------	----

Technology	LED
------------	-----

Electrical parameters

Cable length	1 m
--------------	-----

Electric shock protection class	III
---------------------------------	-----

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	2500 Lm
--	---------

Correlated color temperature	5000K (neutral white)
------------------------------	--------------------------

VIDEX-STREET-LED-SOLAR-LANA-100W-NW

INDEX: VLE-SLSO-305

Beam angle	90 × 130°
------------	-----------

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

Lifetime	30000 h
----------	---------

On/Off cycles	20000
---------------	-------

Additional information

Place of installation	Pillar
-----------------------	--------

Place of application	outdoor
----------------------	---------

Impact protection	IK07
-------------------	------

Housing colour	Gray
----------------	------

Minimum distance from the illuminated object	0.5 m
--	-------

Diffuser material	Polycarbonate (PC)
-------------------	--------------------

Motion sensor	no
---------------	----

Operating temperature range	-20° +50°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP65
--------------------	------

Housing material	Aluminum alloy
------------------	----------------

Dimensions

EAN	5904405541203
-----	---------------

Height	495 mm
--------	--------

Width	210 mm
-------	--------

Depth	54 mm
-------	-------

Outer box	4 pcs.
-----------	--------

VIDEX®

VIDEX-STREET-LED-SOLAR-LANA-100W-NW



INDEX: VLE-SLSO-305

VIDEX®

VIDEX-STREET-LED-SOLAR-LANA-100W-NW

INDEX: VLE-SLSO-305

INDEX: VLE-SLSO-305

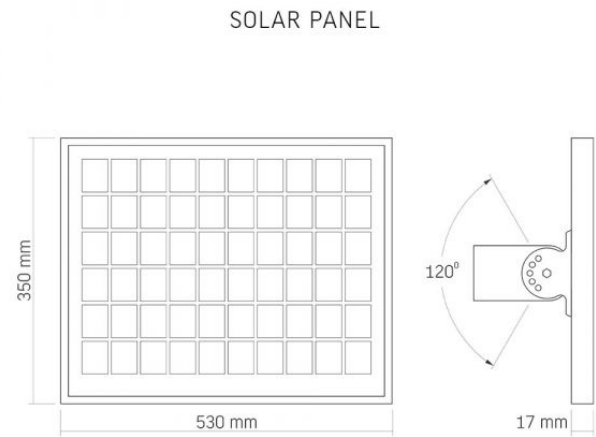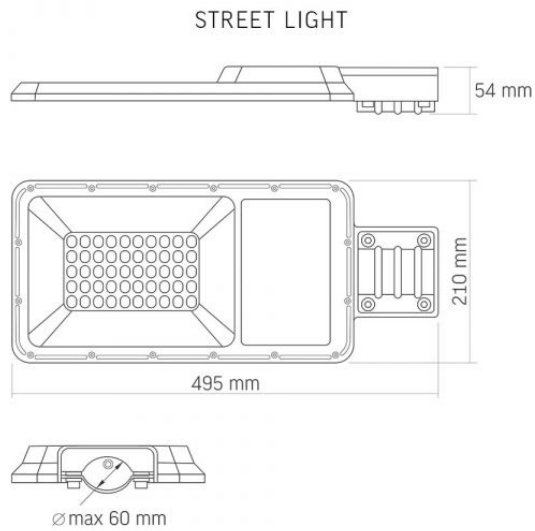

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.