

TECHNICAL CARD



LED Solar Wall Light with motion sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80

2000
CYCLESON/OFF
20 000

IK07



-20° +45°C



CCT 5000K



Free



IP54

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutraus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
Light source or containing product	Containing product

Type of light source

Technology	LED
------------	-----

Electrical parameters

Rated voltage, frequency	3.2 V
--------------------------	-------

Photometric parameters

Correlated color temperature	5000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80

VIDEX VL-BHSO-002-S 500Lm 5000K

INDEX: VL-BHSO-002-S

Lifetime	2000 battery cycles
On/Off cycles	20000
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Wall
Place of application	outdoor
Housing colour	Black
Impact protection	IK07
Minimum distance from the illuminated object	0.5 m
Diffuser material	ABS
Motion sensor	yes
Operating temperature range	-20° +45°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP54
Housing material	ABS

Dimensions

EAN	4820246485487
Height	220 mm
Width	220 mm
Depth	97 mm

VIDEX®

VIDEX VL-BHSO-002-S 500Lm 5000K

INDEX: VL-BHSO-002-S

In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	406g

Signs marking goods

Packaging marking

Recycling of
waste, CE,
Utilization



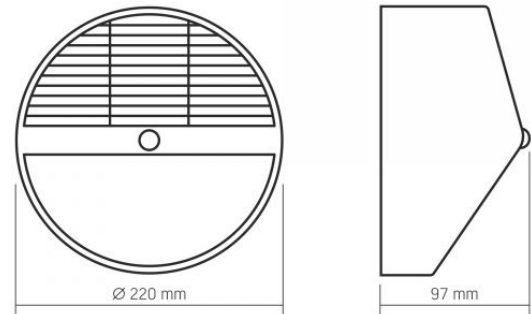
VIDEX®

VIDEX VL-BHSO-002-S 500Lm 5000K

INDEX: VL-BHSO-002-S

VIDEX[®]

VIDEX VL-BHSO-002-S 500Lm 5000K

INDEX: VL-BHSO-002-S

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.