

TECHNICAL CARD



LED Solar Wall Light with motion sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



Ra ≥ 80

ON/OFF
20 000

30 000 h



-10° +40°C

2000
CYCLES

CCT 5000K



Free



IP54

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	no
--------------------------	----

Type of light source

Technology	LED
------------	-----

Electrical parameters

Rated voltage, frequency	3.2 V
--------------------------	-------

Photometric parameters

Correlated color temperature	5000K (neutral white)
------------------------------	--------------------------

Beam angle	60°
------------	-----

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

On/Off cycles	20000
---------------	-------

VIDEX VL-WLSO-025-S

INDEX: VL-WLSO-025-S

Lifetime (L70B50)	30000 h
-------------------	---------

Rated number of the battery charge cycles	2000 cycles
---	-------------

Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
---	------------

Additional information

Battery power	6.4 Wh
---------------	--------

Place of installation	Pillar
-----------------------	--------

Place of application	outdoor
----------------------	---------

Impact protection	IK06
-------------------	------

Housing colour	Black
----------------	-------

Diffuser material	ABS
-------------------	-----

Minimum distance from the illuminated object	0.5 m
--	-------

Motion sensor	yes
---------------	-----

Operating temperature range	-10° +40°C
-----------------------------	------------

Battery voltage	3.2 V
-----------------	-------

Battery capacity	2000 mAh
------------------	----------

Battery type	LiFePO4
--------------	---------

Battery replaceable	no
---------------------	----

Suitable for installation in normally flammable surfaces	yes
--	-----

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP54
--------------------	------

Housing material	ABS
------------------	-----

Dimensions

EAN	4820246484312
-----	---------------

VIDEX®

VIDEX VL-WLSO-025-S

INDEX: VL-WLSO-025-S

In the package	1 pc.
Height	130 mm
Outer box	20 pcs.
Width	190 mm
Depth	28 mm
Unit nett weight	320g

Signs marking goods

Packaging marking

Recycling of
waste, CE,
Utilization



VIDEX[®]

VIDEX VL-WLSO-025-S

INDEX: VL-WLSO-025-S


VIDEX®

VIDEX VL-WLSO-025-S

INDEX: VL-WLSO-025-S



INDEX: VL-WLSO-025-S

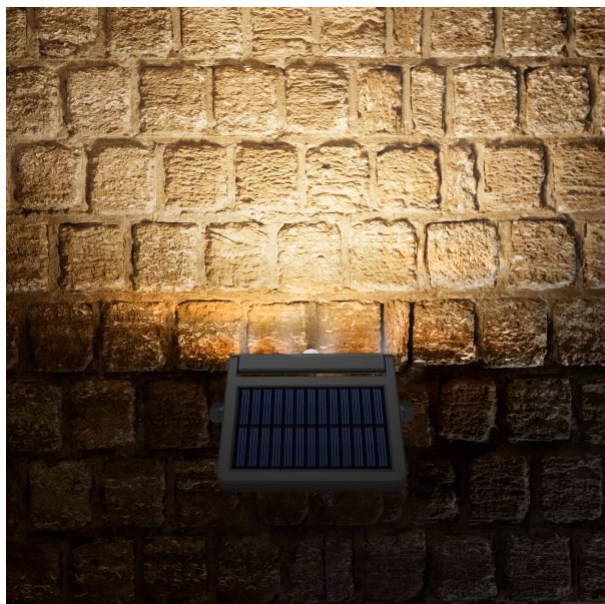

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used outdoors



Minimum distance from the illuminated object



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Ra > 80 - color rendering index



— Rated On/off cycles



— Nominal lifetime (hours)



— Operating temperatures range



— Rated number of the battery charge cycles



— Colour consistency in MacAdam ellipses (SDCM)



— The product does not contain mercury



— Class of protection against dust and moisture.
The product is protected against the ingress of water and dust particles into the housing

