

## TECHNICAL CARD



LED Street Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



90×130°



Ra ≥ 80



30 000 h

ON/OFF  
20 000

IK07



-20°C +50°C



Not Dimmable



Free



IP65

## WARRANTY 3 YEARS

### NEUTRAL WHITE



## 4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

LED street light with complete protection against water, dirt and mechanical impact. This product is intended for lighting of park paths, street sidewalks, yards, roads of local and regional importance. A wide range of operating temperatures removes restrictions on the use of the light in any weather...

### General parameters

Control gear replaceable	-
Light source replaceable	no

### Type of light source

Energy class of the light source	E
Dimmable	no

### Electrical parameters

On-mode power (Pon)	100 W
---------------------	-------

## VIDEX-STREET-LED-LEYA-100W-NW

### INDEX: VLE-SLe14-1004

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	30 cm
Rated current	480 mA
Input interface	Free wire ends
Electric shock protection class	I

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	10000 Lm
Correlated color temperature	4000K (neutral white)
Peak luminous intensity	7000 cd
Beam angle	90 × 130°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a wide cone (120°)

### Additional information

Place of installation	Pillar, Wall
Vertical adjustment range	200°
Place of application	outdoor
Impact protection	IK07
Housing colour	Gray
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)

# VIDEX®

## VIDEX-STREET-LED-LEYA-100W-NW


### INDEX: VLE-SLe14-1004

<b>Operating temperature range</b>	-20° +50°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum alloy

#### Dimensions

<b>EAN</b>	5904405541081
<b>Height</b>	564 mm
<b>Width</b>	189 mm
<b>Depth</b>	97 mm
<b>Outer box</b>	5 pcs.

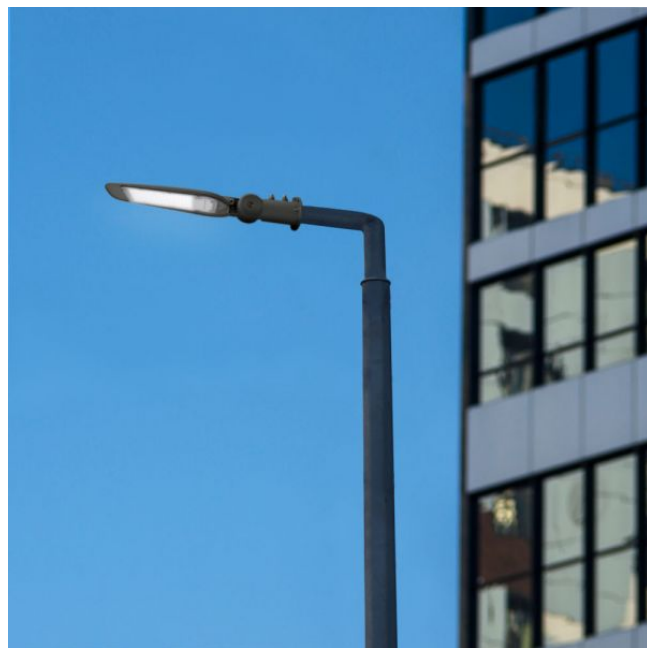

**VIDEX<sup>®</sup>****VIDEX-STREET-LED-LEYA-100W-NW****INDEX: VLE-SLe14-1004**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

