

TECHNICAL CARD



LED Street Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-STREET-LED-LEYA-100W-NW5

INDEX: VLE-SLE14-1005

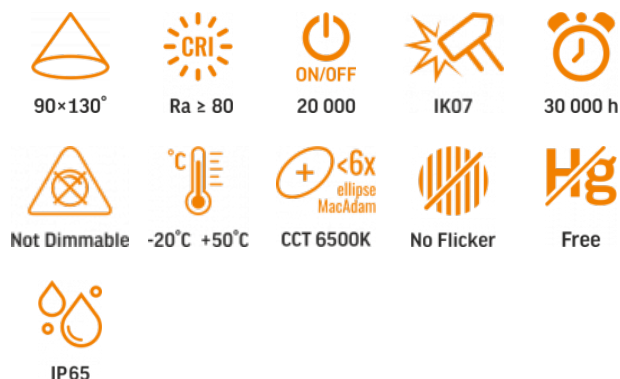

WARRANTY 3 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

LED street light with complete protection against water, dirt and mechanical impact. This product is intended for lighting of park paths, street sidewalks, yards, roads of local and regional importance. A wide range of operating temperatures removes restrictions on the use of the light in any weather...

General parameters

Light source or containing product	Light source
Control gear replaceable	-
Light source replaceable	no

Type of light source

Energy class of the light source	E
Dimmable	no

Directional (DLS) or non-directional (NDLS) light source	DLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
Technology	LED

Electrical parameters

On-mode power (Pon)	100 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	30 cm
Rated current	480 mA
Input interface	Free wire ends
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	100
Displacement factor (cos φ1)	0.9
Survival factor	0.9

Photometric parameters

Useful luminous flux (Φuse)	10000 Lm
Correlated color temperature	5000K (neutral white)
Peak luminous intensity	7000 cd
Beam angle	90 × 130°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000

INDEX: VLE-SLE14-1005

Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (6500K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	outdoor use

EAN	5904405542279
Height	564 mm
Depth	97 mm
Width	189 mm
In the package	1 pc.
Outer box	5 pcs.

Signs marking goods

Packaging marking


Recycling of waste, CE, Utilization

Additional information


Vertical adjustment range	200°
Place of installation	Pillar, Wall
Place of application	outdoor
Impact protection	IK07
Housing colour	Gray
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Operating temperature range	-20° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions

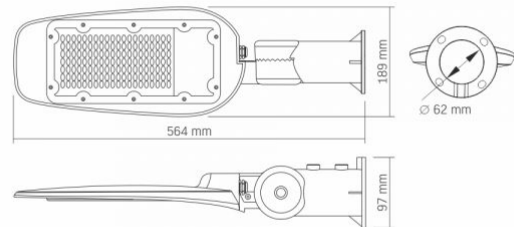







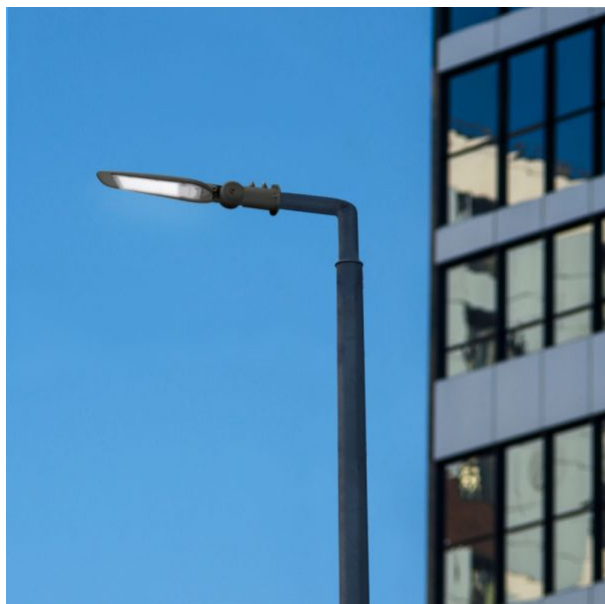











VIDEX[®]**VIDEX-STREET-LED-LEYA-100W-NW5****INDEX: VLE-SLE14-1005**

INDEX: VLE-SLE14-1005



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used outdoors
-  Minimum distance from the illuminated object
0,5 m
-  Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Effective light beam angle
90°x130°
-  — Ra > 80 - color rendering index
Ra > 80
-  — Rated On/off cycles
ON/OFF
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)
IK07
-  — Nominal lifetime (hours)
30 000 h
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20°C +50°C
-  — Colour consistency in MacAdam ellipses (SDCM)
CCT 6500K
-  — The flickering of the light does not exceed the permissible level
No Flicker
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions
IP65