

TECHNICAL CARD



LED Street Light



0,5 m



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



90×130°



Ra ≥ 80



30 000 h

ON/OFF
20 000

IK07



-20°C +50°C



Not Dimmable



Free



IP65

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable	-
Light source replaceable	no

Type of light source

Energy class of the light source	E
Dimmable	no

Electrical parameters

On-mode power (P _{on})	50 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	30 cm
Rated current	240 mA
Input interface	Free wire ends

VIDEX-STREET-LED-LEYA-50W-NW

INDEX: VLE-SLe14-504

Electric shock protection class I

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	5000 Lm
Correlated color temperature	4000K (neutral white)
Peak luminous intensity	3100 cd
Beam angle	90 × 130°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a wide cone (120°)

Additional information

Place of installation	Pillar, Wall
Vertical adjustment range	200°
Place of application	outdoor
Impact protection	IK07
Housing colour	Gray
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Operating temperature range	-20° +50°C
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

VIDEX®



VIDEX-STREET-LED-LEYA-50W-NW

INDEX: VLE-SLe14-504

Dimensions

EAN	5904405541074
Height	487 mm
Width	151 mm
Depth	88 mm
Outer box	10 pcs.

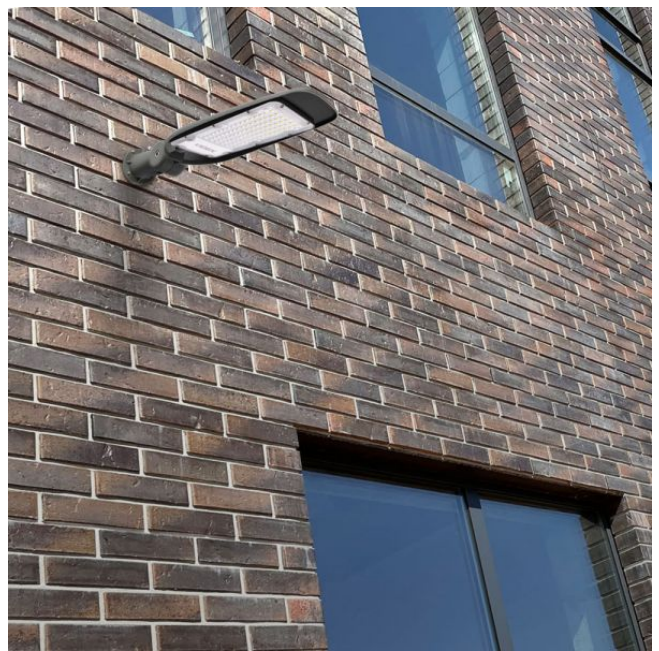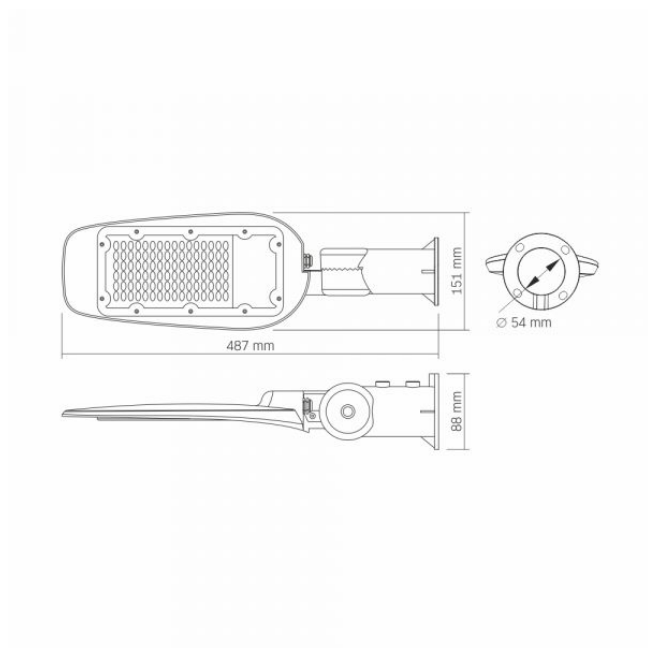

INDEX: VLE-SLe14-504

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.