

# VIDEX®

VIDEX IP65 SLE18 30W 3000Lm 5000K 220V

INDEX: VL-SLE18-0305

## TECHNICAL CARD



LED Street Light

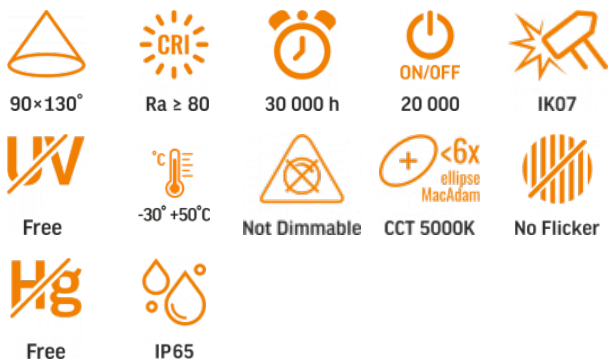


Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX IP65 SLE18 30W 3000Lm 5000K 220V

### INDEX: VL-SLE18-0305



## WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

## General parameters

Control gear replaceable	-
Light source replaceable	by the producer
Light source or containing product	Light source

## Type of light source

Energy class of the light source	F
Dimmable	no
Directional or non-directional light source	DLS
Mains or non-mains light source	MLS
Connected light source (cls)	no
Colour-tuneable light source (CTLS)	no
High luminance light source	No

Anti-glare shield	No
Technology	LED

## Electrical parameters

On-mode power (Pon)	30 W
Rated voltage, frequency	AC 180-265 V, 50/60 Hz
Cable length	30 cm
Rated current	150 mA
Input interface	Free wire ends
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	30
Displacement factor (cos φ1)	0.9
Survival factor	0.9

## Photometric parameters

Useful luminous flux of the light source (Φuse)	2700 Lm
Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1280 cd
Beam angle	90 × 130°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.34

### INDEX: VL-SLE18-0305

Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	outdoor use
CRI Min	Ra 80
CRI Max	Ra 88

EAN	4820246486002
Height	424 mm
Width	108 mm
Depth	76 mm
Outer box	10 pcs.
Unit nett weight	570g
In the package	1 pc.

### Additional information

Place of installation	Pillar, Wall
Vertical adjustment range	25°
Place of application	outdoor
Housing colour	Black
Impact protection	IK07
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-30° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

### Dimensions

### Signs marking goods

#### Packaging marking

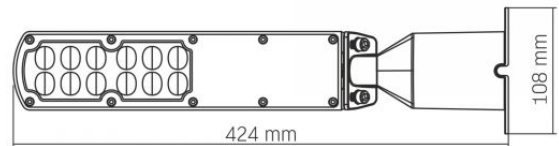
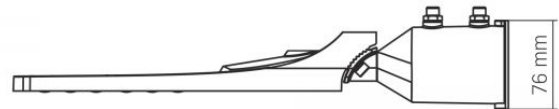
Recycling of  
waste, CE,  
Utilization



**VIDEX<sup>®</sup>**

VIDEX IP65 SLE18 30W 3000Lm 5000K 220V

**INDEX: VL-SLE18-0305**

**VIDEX<sup>®</sup>****VIDEX IP65 SLE18 30W 3000Lm 5000K 220V****INDEX: VL-SLE18-0305**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.