

VIDEX®

VIDEX IP65 SLE18 50W 5000Lm 5000K 220V

INDEX: VL-SLE18-0505

TECHNICAL CARD




LED Street Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

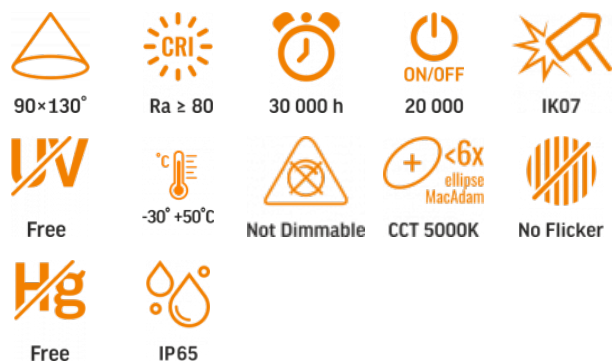

WARRANTY 2 YEARS

NEUTRAL WHITE
5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable	-
Light source replaceable	by the producer
Light source or containing product	Light source

Type of light source

Energy class of the light source	F
Dimmable	no
Directional or non-directional light source	DLS
Mains or non-mains light source	MLS
Connected light source (cls)	no
Colour-tuneable light source (CTLS)	no
High luminance light source	No

VIDEX IP65 SLE18 50W 5000Lm 5000K 220V

INDEX: VL-SLE18-0505

Anti-glare shield	No
Technology	LED

Electrical parameters

On-mode power (Pon)	50 W
Rated voltage, frequency	AC 180-265 V, 50/60 Hz
Cable length	30 cm
Rated current	250 mA
Input interface	Free wire ends
Electric shock protection class	I
Displacement factor (cos φ1)	0.9
Energy consumption in on-mode of the light source (kWh/1000h)	50
Survival factor	0.9

Photometric parameters

Useful luminous flux of the light source (Φuse)	4500 Lm
Correlated color temperature	5000K (neutral white)
Peak luminous intensity	2160 cd
Beam angle	90 × 130°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.34

INDEX: VL-SLE18-0505

Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	outdoor use
CRI Min	Ra 80
CRI Max	Ra 88

EAN	4820246486019
Height	507 mm
Width	108 mm
Depth	76 mm
Outer box	10 pcs.
Unit nett weight	770g
In the package	1 pc.

Additional information

Place of installation	Pillar, Wall
Vertical adjustment range	25°
Place of application	outdoor
Housing colour	Black
Impact protection	IK07
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-30° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions
Signs marking goods
Packaging marking


Recycling of
waste, CE,
Utilization



VIDEX[®]

VIDEX IP65 SLE18 50W 5000Lm 5000K 220V

INDEX: VL-SLE18-0505

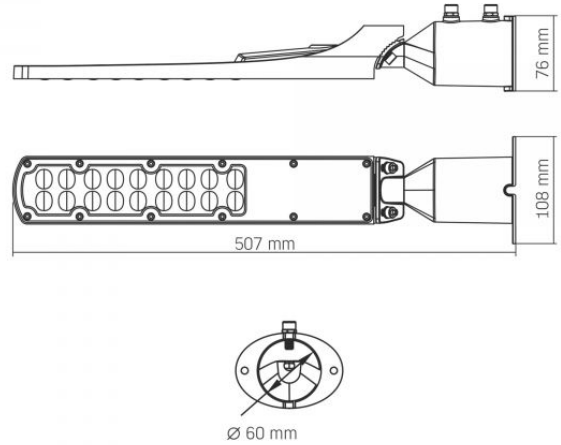VIDEX[®]**VIDEX IP65 SLE18 50W 5000Lm 5000K 220V****INDEX: VL-SLE18-0505**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.