

TECHNICAL CARD




LED Track Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VLE-TR04-304W

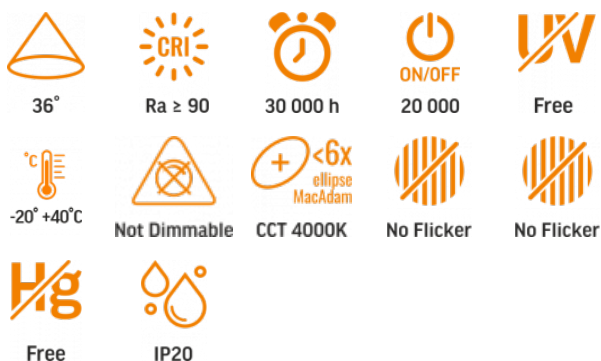

WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable	by the producer
Light source or containing product	Containing product

Type of light source

Energy class of the light source	F
Dimmable	no
Directional or non-directional light source	DLS
Mains or non-mains light source	MLS
Colour-tuneable light source (CTLS)	no
Technology	LED

Electrical parameters

On-mode power (P _{on})	30 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	145 mA
Input interface	2 Wires Busbar
Electric shock protection class	II
Energy consumption in on-mode of the light source (kWh/1000h)	30
Displacement factor (cos φ ₁)	0.9

Photometric parameters

Useful luminous flux of the light source (Φ _{use})	2400 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	36°
Color rendering index (CRI)	Ra > 90
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a narrow cone (90°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Stroboscopic effect metric (SVM)	≤0.4
Flicker metric (Pst LM)	≤1
CRI Min	Ra 90

VIDEX[®]

VIDEX-TOR-30W-WHITE

INDEX: VLE-TR04-304W

CRI Max	Ra 95
---------	-------

Additional information

Place of installation	Busbar track
-----------------------	--------------

Place of application	indoor
----------------------	--------

Housing colour	White
----------------	-------

Minimum distance from the illuminated object	0.5 m
--	-------

Diffuser material	PMMA
-------------------	------

Ultraviolet radiation	no
-----------------------	----

Operating temperature range	-20° +40°C
-----------------------------	------------

Suitable for installation in normally flammable surfaces	yes
--	-----

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP20
--------------------	------

Housing material	Aluminum alloy
------------------	----------------

Dimensions

EAN	5904405541487
-----	---------------

Height	180 mm
--------	--------

Width	77 mm
-------	-------

Depth	77 mm
-------	-------


In the package	1 pc.
----------------	-------

Outer box	20 pcs.
-----------	---------

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------

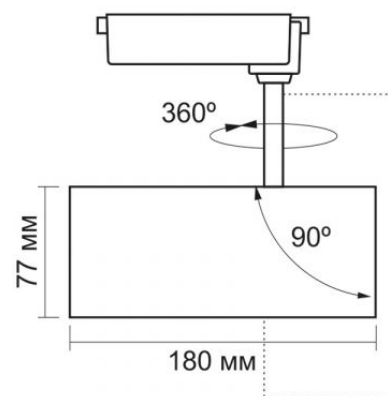

VIDEX[®]**VIDEX-TOR-30W-WHITE****INDEX: VLE-TR04-304W**

INDEX: VLE-TR04-304W

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.