

## TECHNICAL CARD



LED Track Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX-TOR-30W-WHITE

### INDEX: VLE-TR04-304W

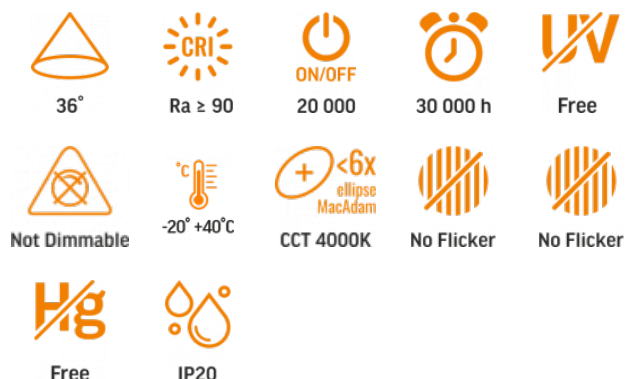

## WARRANTY 3 YEARS

### NEUTRAL WHITE



### 4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

Light source or containing product	Light source
Light source replaceable	by the producer

## Type of light source

Energy class of the light source	F
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	DLS
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
Technology	LED

## Electrical parameters

On-mode power (Pon)	30 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	145 mA
Input interface	2 Wires Busbar
Electric shock protection class	II
Energy consumption in on-mode of the light source (kWh/1000h)	30
Displacement factor (cos φ1)	0.9

## Photometric parameters

Useful luminous flux (Φuse)	2400 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	36°
Color rendering index (CRI)	Ra > 90
On/Off cycles	20000
Lifetime	30000 h
Useful luminous flux of the light source reference	in a narrow cone (90°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4
CRI Min	Ra 90

CRI Max Ra 95

## Additional information

Place of installation	Busbar track
Place of application	indoor
Housing colour	White
Minimum distance from the illuminated object	0.5 m
Diffuser material	PMMA
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum alloy


## Dimensions

EAN	5904405541487
Height	180 mm
Depth	77 mm
Width	77 mm
In the package	1 pc.
Outer box	20 pcs.

## Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------

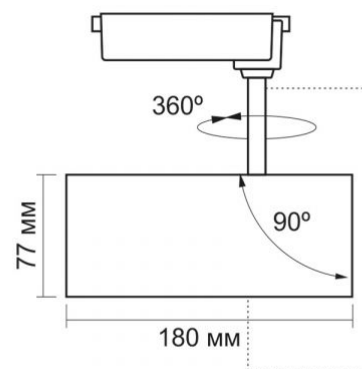




















**VIDEX<sup>®</sup>****VIDEX-TOR-30W-WHITE****INDEX: VLE-TR04-304W**

### INDEX: VLE-TR04-304W



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  Minimum distance from the illuminated object  
0,5 m
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
36°
-  — Ra > 90 - color rendering index  
Ra > 90
-  — Rated On/off cycles  
ON/OFF 20 000
-  — Nominal lifetime (hours)  
30 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20°-40°C
-  — Colour consistency in MacAdam ellipses (SDCM)  
CCT 4000K
-  — The flickering of the light does not exceed the permissible level  
No Flicker
-  — The product has minimal flickering, which should not cause discomfort or danger  
No Flicker
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture  
IP20