



TECHNICAL CARD





LED wall-mounted Light IP65
















INDEX: VL-WL03-12CW































CCT 6500K

IP65

WARRANTY 2 YEARS



General parameters

Light source or containing product	Light source
Light source replaceable	no

Type of light source

Energy class of the light source	F
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	yes
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

On-mode power (Pon)	12 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	75 mA
Input interface	Terminal block
Electric shock protection class	II
Displacement factor (cos φ1)	0.7
Survival factor	1
Energy consumption in on-mode of the light source (kWh/1000h)	12

Photometric parameters

Correlated color temperature Correlated color temperature Each angle Color rendering index (CRI) Color rendering index (CRI) Ra > 8 Con/Off cycles Lifetime (L70B50) Useful luminous flux of the light source in a spreference (360°) R9 colour rendering index value >0 The lumen maintenance factor ≥94.89 Flicker metric (Pst LM) ≤1 Stroboscopic effect metric (SVM) ≤0.4	
Color rendering index (CRI)Ra > 8On/Off cycles15000Lifetime (L70B50)25000Useful luminous flux of the light source referencein a spi (360°)R9 colour rendering index value>0The lumen maintenance factor ≥ 94.89 Flicker metric (Pst LM) ≤ 1	al
On/Off cycles 15000 Lifetime (L70B50) 25000 Useful luminous flux of the light source reference in a sp (360°) R9 colour rendering index value >0 The lumen maintenance factor ≥94.89 Flicker metric (Pst LM) ≤1	
Lifetime (L70B50) 25000 Useful luminous flux of the light source in a spireference (360°) R9 colour rendering index value >0 The lumen maintenance factor ≥94.89 Flicker metric (Pst LM) ≤1	0
Useful luminous flux of the light source in a spin (360°) R9 colour rendering index value >0 The lumen maintenance factor ≥94.89 Flicker metric (Pst LM) ≤1	
reference (360°) R9 colour rendering index value >0 The lumen maintenance factor ≥94.89 Flicker metric (Pst LM) ≤1	h
The lumen maintenance factor ≥94.89 Flicker metric (Pst LM) ≤1	here
Flicker metric (Pst LM) ≤1	
	%
Stroboscopic effect metric (SVM) ≤0.4	
Colour consistency in MacAdam ellipses <6 (30 <6 (40 <6 (65)	00K),
CRI Min Ra 80	



INDEX: VL-WL03-12CW

CRI Max Ra 88

Additional information

Place of installation	Flat surface, Wall
Place of application	indoor, outdoor
Impact protection	IK06
Housing colour	White
Diffuser material	Polycarbonate (PC)
Minimum distance from the illuminated object	0.5 m
Ultraviolet radiation	no
Motion sensor	no
Operating temperature range	-20° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Plastic

Dimensions

EAN	4820246487979
In the package	1 pc.
Height	180 mm
Outer box	20 pcs.
Width	180 mm
Depth	47 mm
Unit nett weight	250g

Signs marking goods

Packaging marking CE, Utilization




















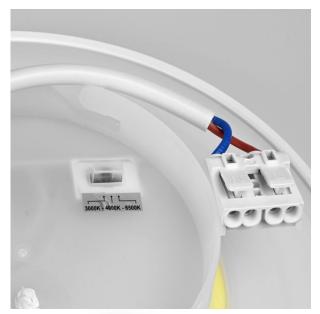














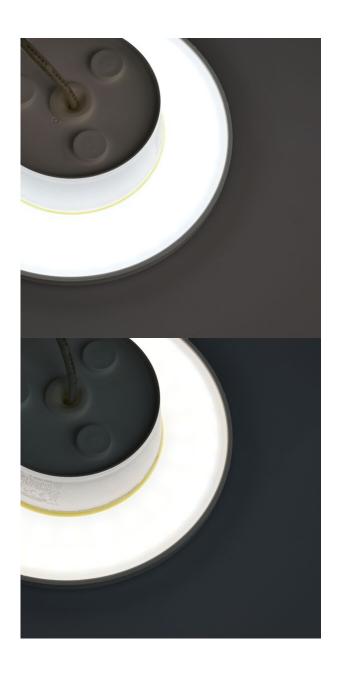


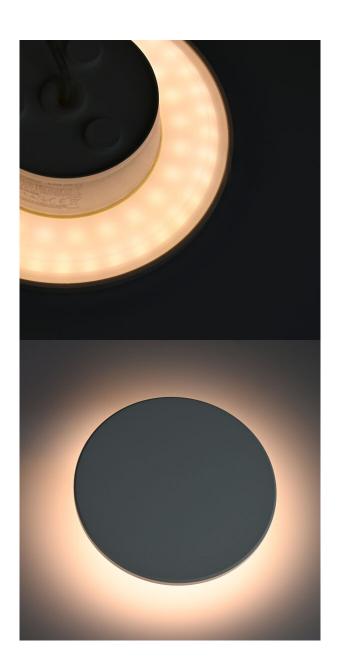






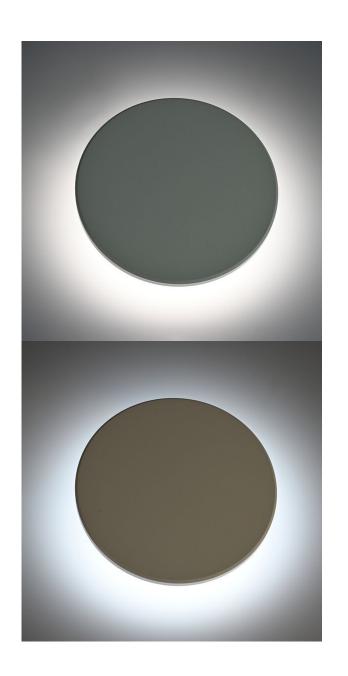

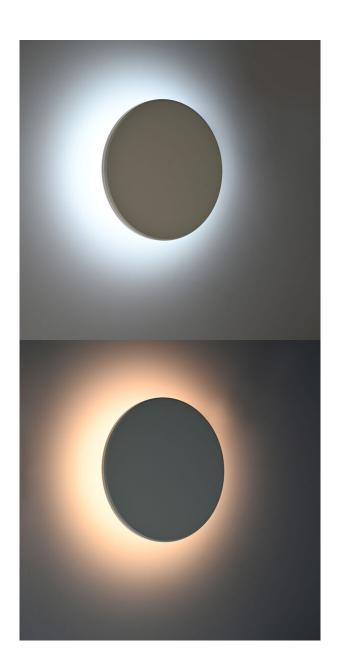




INDEX: VL-WL03-12CW

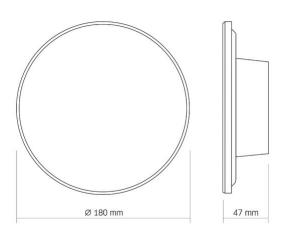

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

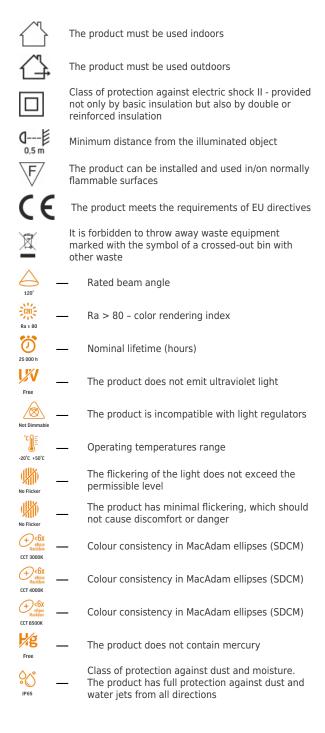

Date: 18.11.2025