

TECHNICAL CARD



PIR motion and light sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



Free



-20° +40°C



IP20

WARRANTY 2 YEARS

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Input interface	Free wire ends
Electric shock protection class	II
Standby Power (Psb)	<0.9 W

Photometric parameters

Sensor light threshold	10-2000 Lx
------------------------	------------

Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor
Housing colour	White
Ultraviolet radiation	no
Motion sensor	yes
Sensor type	PIR
Sensor time delay	10 s - 7 min
Sensor detection angle	360°
Sensor detection distance	2 - 8 m
Operating temperature range	-20° +40°C
Ingress protection	IP20

VIDEX VL-SPC12W 1200W

INDEX: VL-SPC12W

Housing material	ABS, PE (Polyethylene)
------------------	---------------------------

Dimensions

EAN	4820118299297
In the package	1 pc.
Height	88 mm
Outer box	50 pcs.
Width	88 mm
Depth	34 mm
Unit nett weight	88g

Signs marking goods


Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------



VIDEX®

VIDEX VL-SPC12W 1200W

INDEX: VL-SPC12W

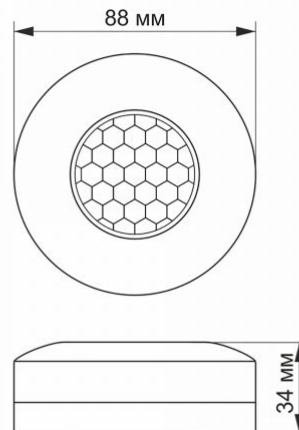

Art. VL-SPC12W



8m

10sec-
7min

10-2000
lx

360°

1200W

IP20

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Free

The product does not emit ultraviolet light



-20° +40°C

Operating temperatures range



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture