

## TECHNICAL CARD



PIR motion and light sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



Free



-20° +40°C



IP54

## WARRANTY 2 YEARS

### Electrical parameters

|                                 |                        |
|---------------------------------|------------------------|
| Rated voltage, frequency        | AC 220-240 V, 50/60 Hz |
| Input interface                 | Free wire ends         |
| Electric shock protection class | II                     |
| Standby Power (Psb)             | <0.9 W                 |

### Photometric parameters

|                        |            |
|------------------------|------------|
| Sensor light threshold | 10-2000 Lx |
|------------------------|------------|

### Additional information

|                             |                             |
|-----------------------------|-----------------------------|
| Place of installation       | Ceiling, Flat surface, Wall |
| Place of application        | indoor, outdoor             |
| Housing colour              | White                       |
| Ultraviolet radiation       | no                          |
| Motion sensor               | yes                         |
| Sensor type                 | PIR                         |
| Sensor detection angle      | 360°                        |
| Sensor time delay           | 10 s - 7 min                |
| Sensor detection distance   | 2 - 8 m                     |
| Operating temperature range | -20° +40°C                  |
| Ingress protection          | IP54                        |

## VIDEX VL-SPC24W 1200W

### INDEX: VL-SPC24W

|                  |                        |
|------------------|------------------------|
| Housing material | ABS, PE (Polyethylene) |
|------------------|------------------------|

### Dimensions

|                  |               |
|------------------|---------------|
| EAN              | 4820118299884 |
| Height           | 103 mm        |
| Depth            | 58 mm         |
| In the package   | 1 pc.         |
| Outer box        | 50 pcs.       |
| Width            | 103 mm        |
| Unit nett weight | 132g          |

### Signs marking goods


|                   |                                     |
|-------------------|-------------------------------------|
| Packaging marking | Recycling of waste, CE, Utilization |
|-------------------|-------------------------------------|



# VIDEX®

## VIDEX VL-SPC24W 1200W

### INDEX: VL-SPC24W

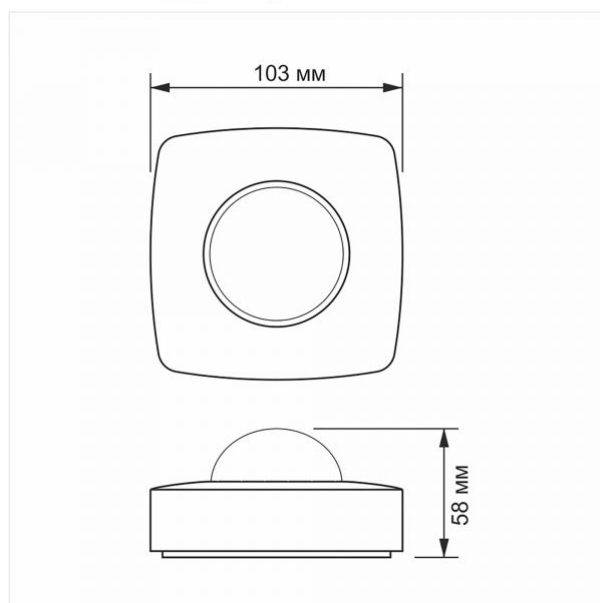

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

## INDEX: VL-SPC24W



The product must be used indoors



The product must be used outdoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Free

— The product does not emit ultraviolet light



-20° +40°C

— Operating temperatures range



IP54

— Class of protection against dust and moisture.  
The product is protected against the ingress of water and dust particles into the housing