

TECHNICAL CARD



Power supply for magnetic slim track light system

INDEX: VL-TRMS-P100B



WARRANTY 3 YEARS

Type of light source

Dimmable	no
----------	----

Electrical parameters

On-mode power (Pon)	100 W
Output voltage	DC 48 V
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	1 A
Input interface	Free wire ends
Electric shock protection class	II

Photometric parameters

On/Off cycles	20000
Lifetime (L70B50)	30000 h

Additional information

Place of installation	Busbar for magnetic slim track
Place of application	indoor

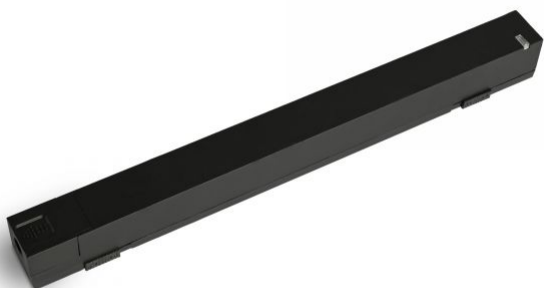
Housing colour	Black
Ultraviolet radiation	no
Operating temperature range	-20° +45°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP20
Housing material	PC

Dimensions

EAN	4820246485807
Height	285 mm
Depth	29 mm
In the package	1 pc.
Outer box	25 pcs.
Width	24 mm
Unit nett weight	220g

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------

VIDEX®**VIDEX VL-TRMS-P100B 100W****INDEX: VL-TRMS-P100B**

VIDEX®

VIDEX VL-TRMS-P100B 100W

INDEX: VL-TRMS-P100B



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VL-TRMS-P100B



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Rated On/off cycles



— Nominal lifetime (hours)



— The product does not emit ultraviolet light



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture