

TECHNICAL CARD



Power supply for magnetic slim track light system



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



30 000 h



Free



-20° +45°C



Free



IP20

WARRANTY 3 YEARS

Electrical parameters

On-mode power (Pon)	200 W
Output voltage	DC 48 V
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	1 A
Input interface	Free wire ends
Electric shock protection class	II

Photometric parameters

Lifetime (L70B50)	30000 h
--------------------------	---------

Additional information

Place of installation	Busbar for magnetic slim track
Place of application	indoor
Housing colour	Black
Ultraviolet radiation	no
Operating temperature range	-20° +45°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain

VIDEX VL-TRMS-P200B 200W

INDEX: VL-TRMS-P200B

Ingress protection	IP20
Housing material	PC

Dimensions

EAN	4820246485814
In the package	1 pc.
Height	340 mm
Outer box	25 pcs.
Width	24 mm
Depth	31 mm
Unit nett weight	350g


Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------




VIDEX[®]

VIDEX VL-TRMS-P200B 200W

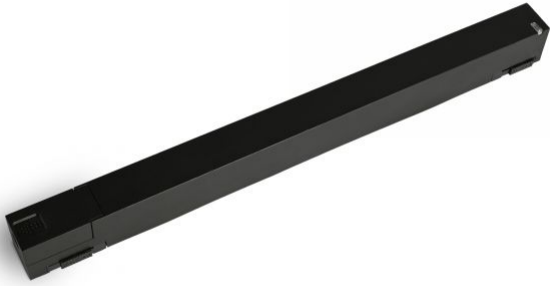INDEX: VL-TRMS-P200B

INDEX: VL-TRMS-P200B

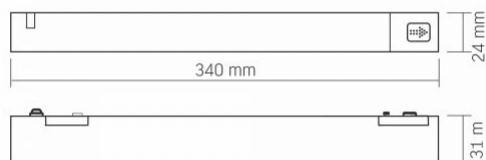

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,

30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



-20° +45°C

— Operating temperatures range



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture